



CEMO PUMPS



Part of the Crown Group of Companies - Traditional Quality & Performance

TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË				PUMP POMP	HP5
--	--	--	--	--------------	-----

MAX MAKS	1800 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	4500 kPa	INLET DIAMETER INLAAT DEURSNEE	40 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	19 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	40 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

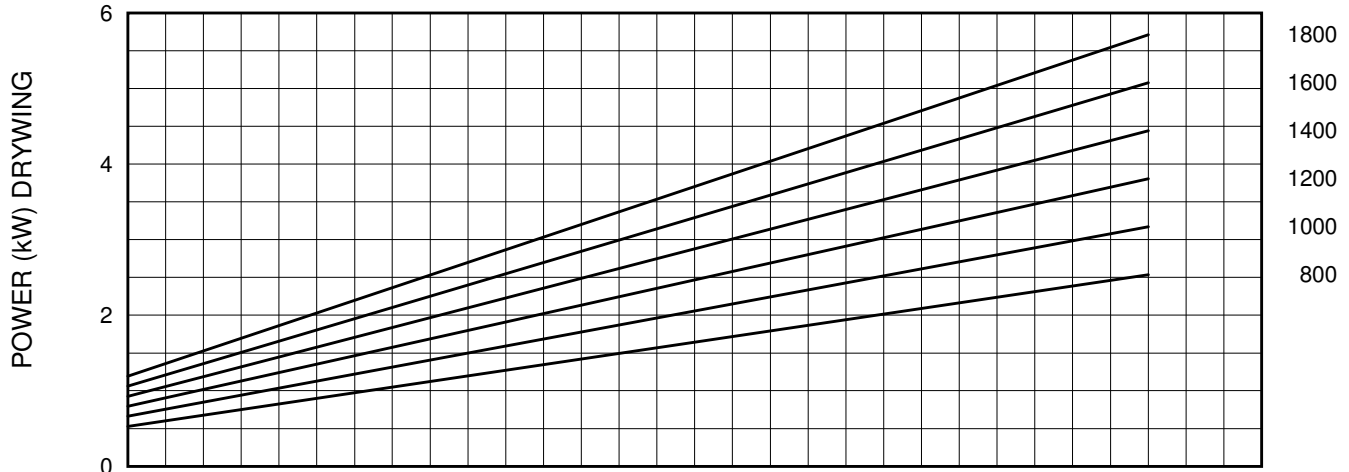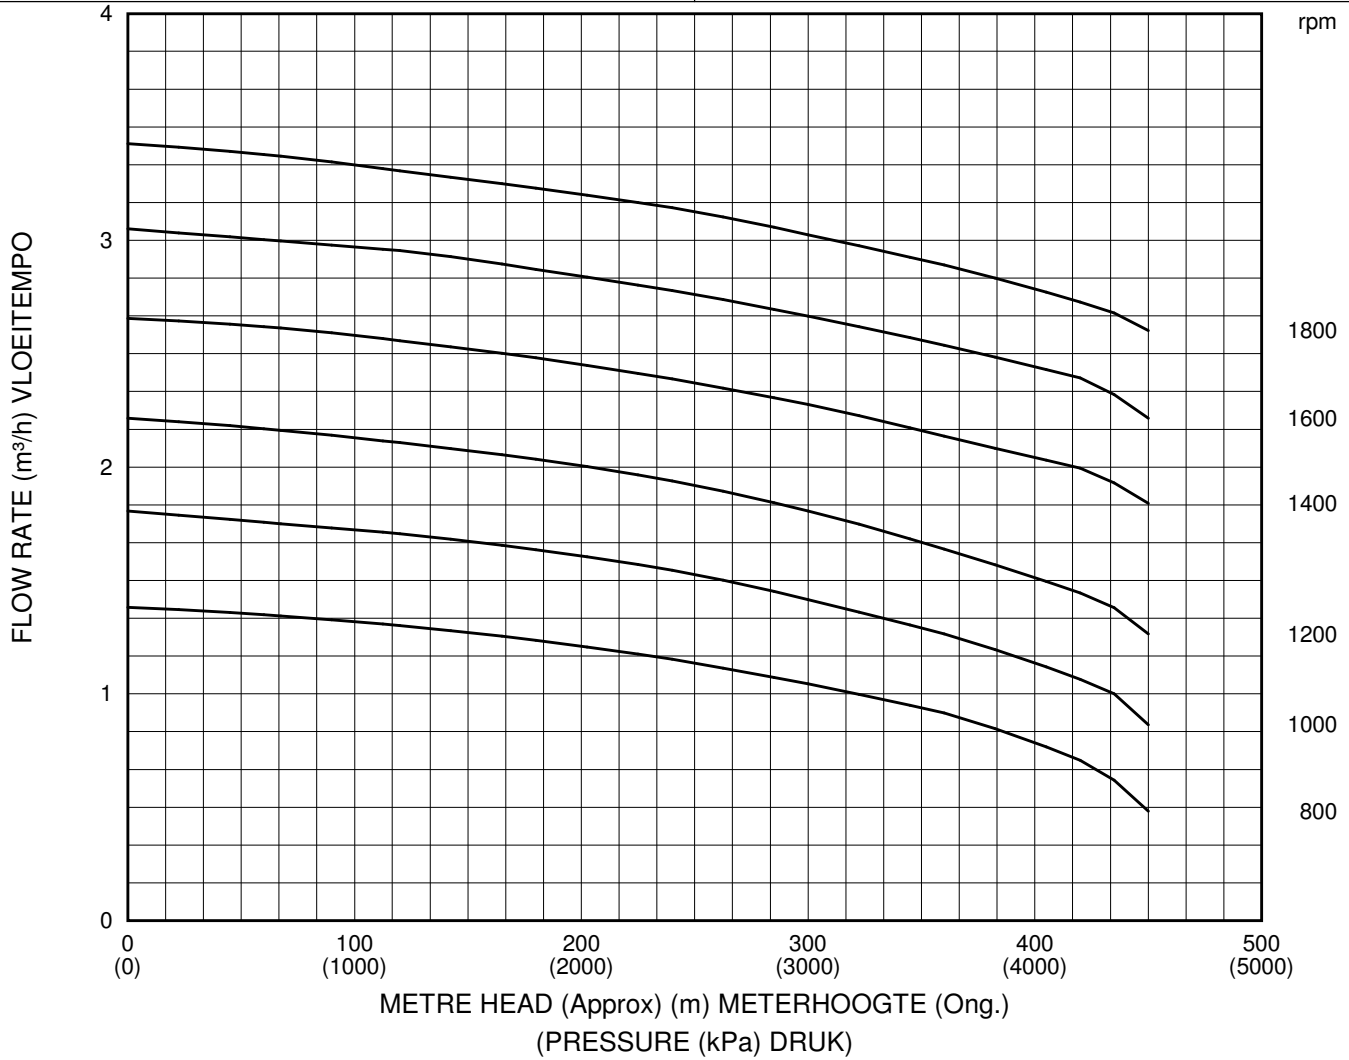



CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



TYPICAL AVERAGE PERFORMANCE
 TIPIESE GEMIDDELDE POMPVERMOË

PUMP POMP
 HP10S

MAX. MAKS	1500 rpm	MAX. DIFF. PRESSURE MAKS. DIFF. DRUK	750 kPa	INLET DIAMETER INLAAT DEURSNEE	40 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	6 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	40 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

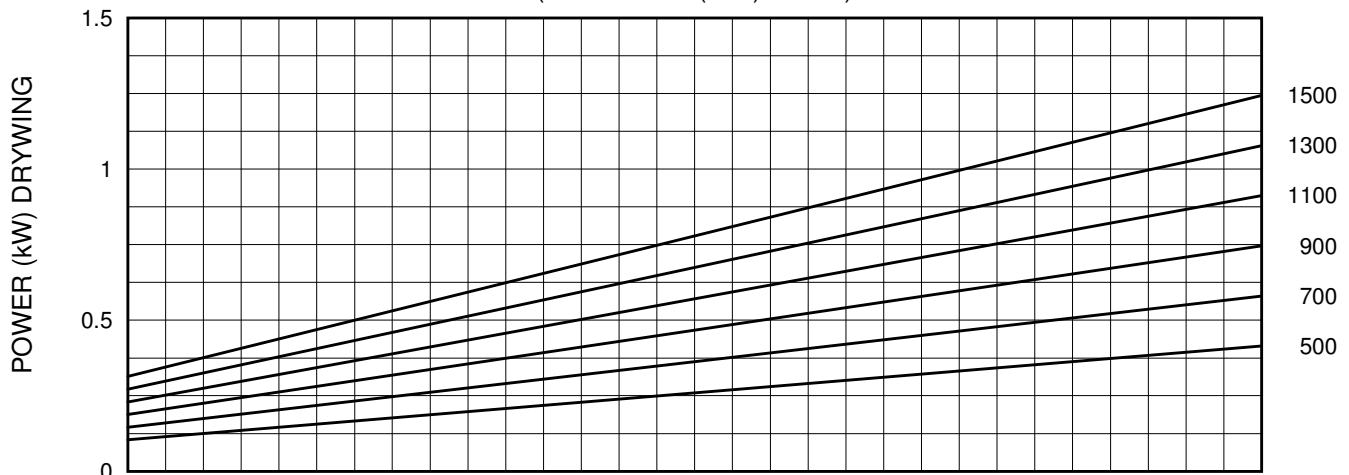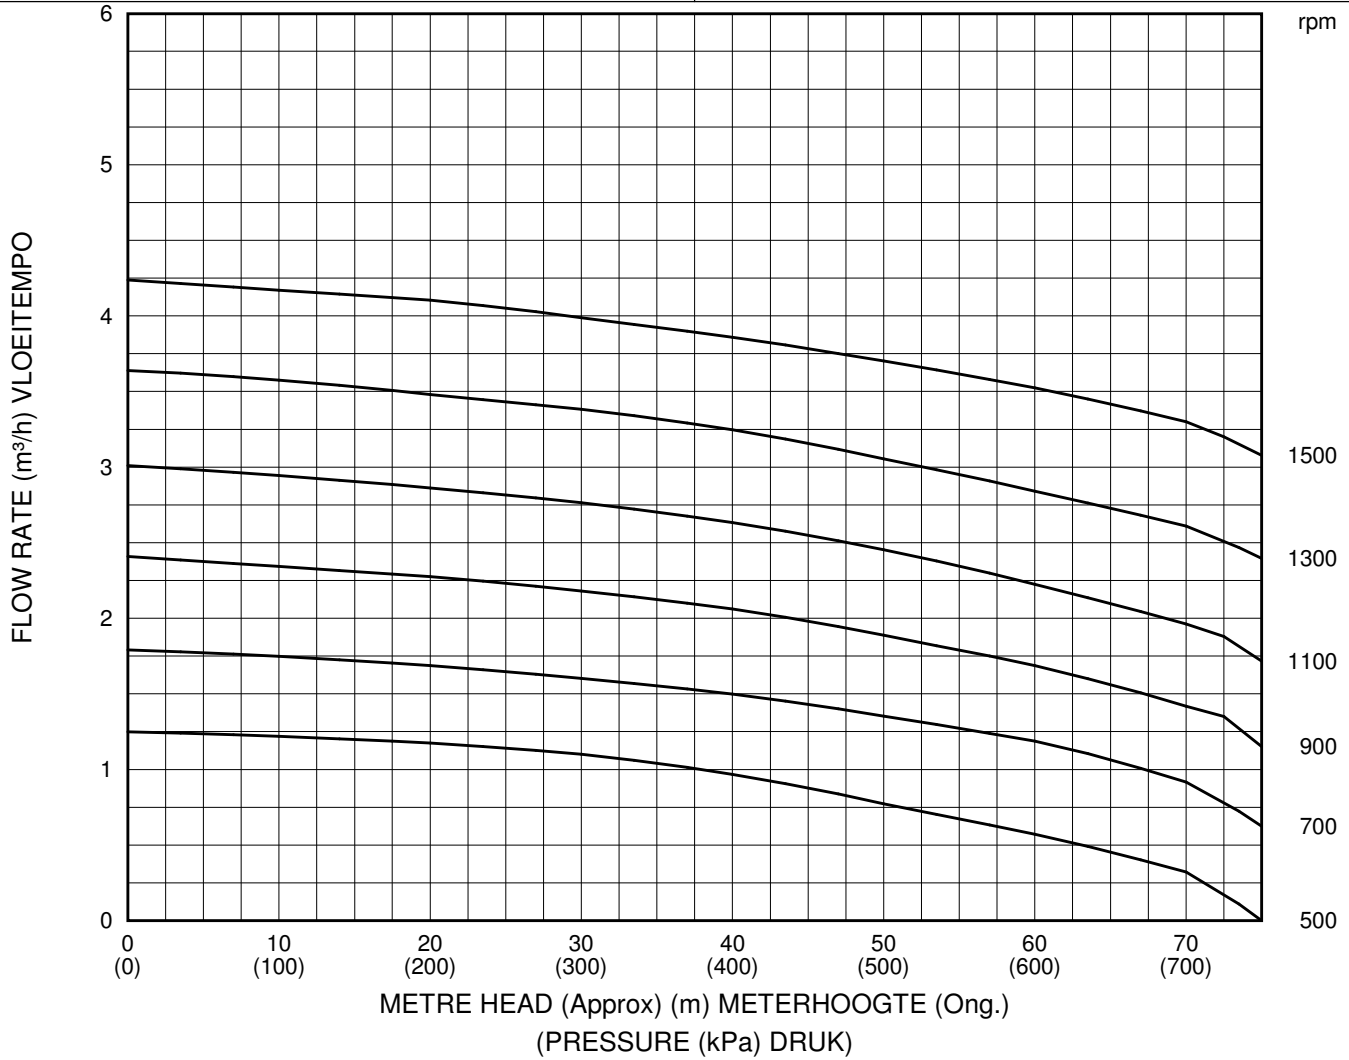



CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË				PUMP POMP	HP10
--	--	--	--	--------------	------

MAX MAKS	1500 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	1500 kPa	INLET DIAMETER INLAAT DEURSNEE	40 mm
-------------	----------	---------------------------------------	----------	-----------------------------------	-------

ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	9 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	40 mm
---------------------	------------	--	-------	-------------------------------------	-------

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

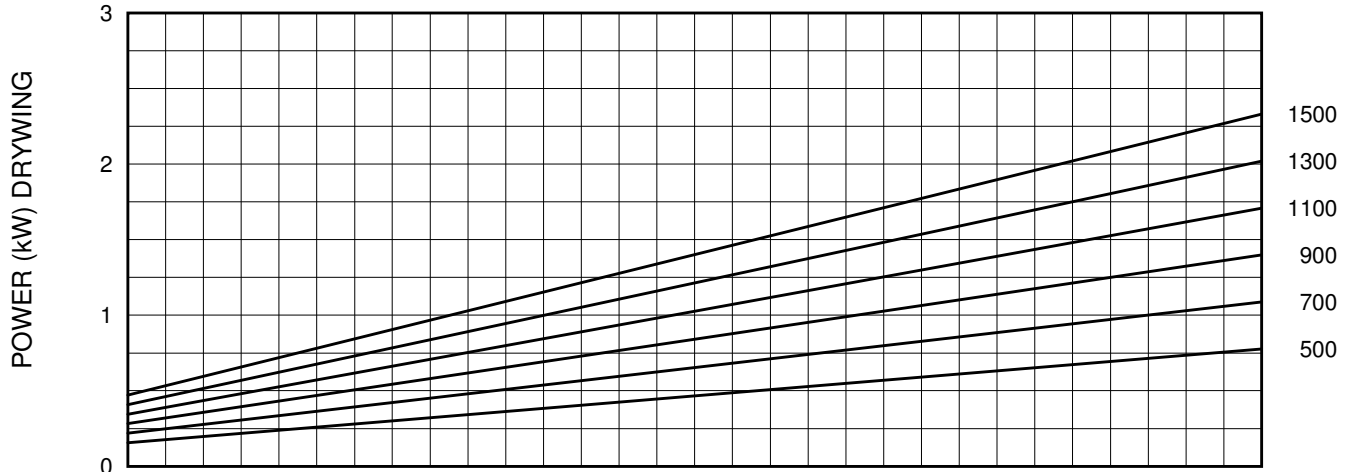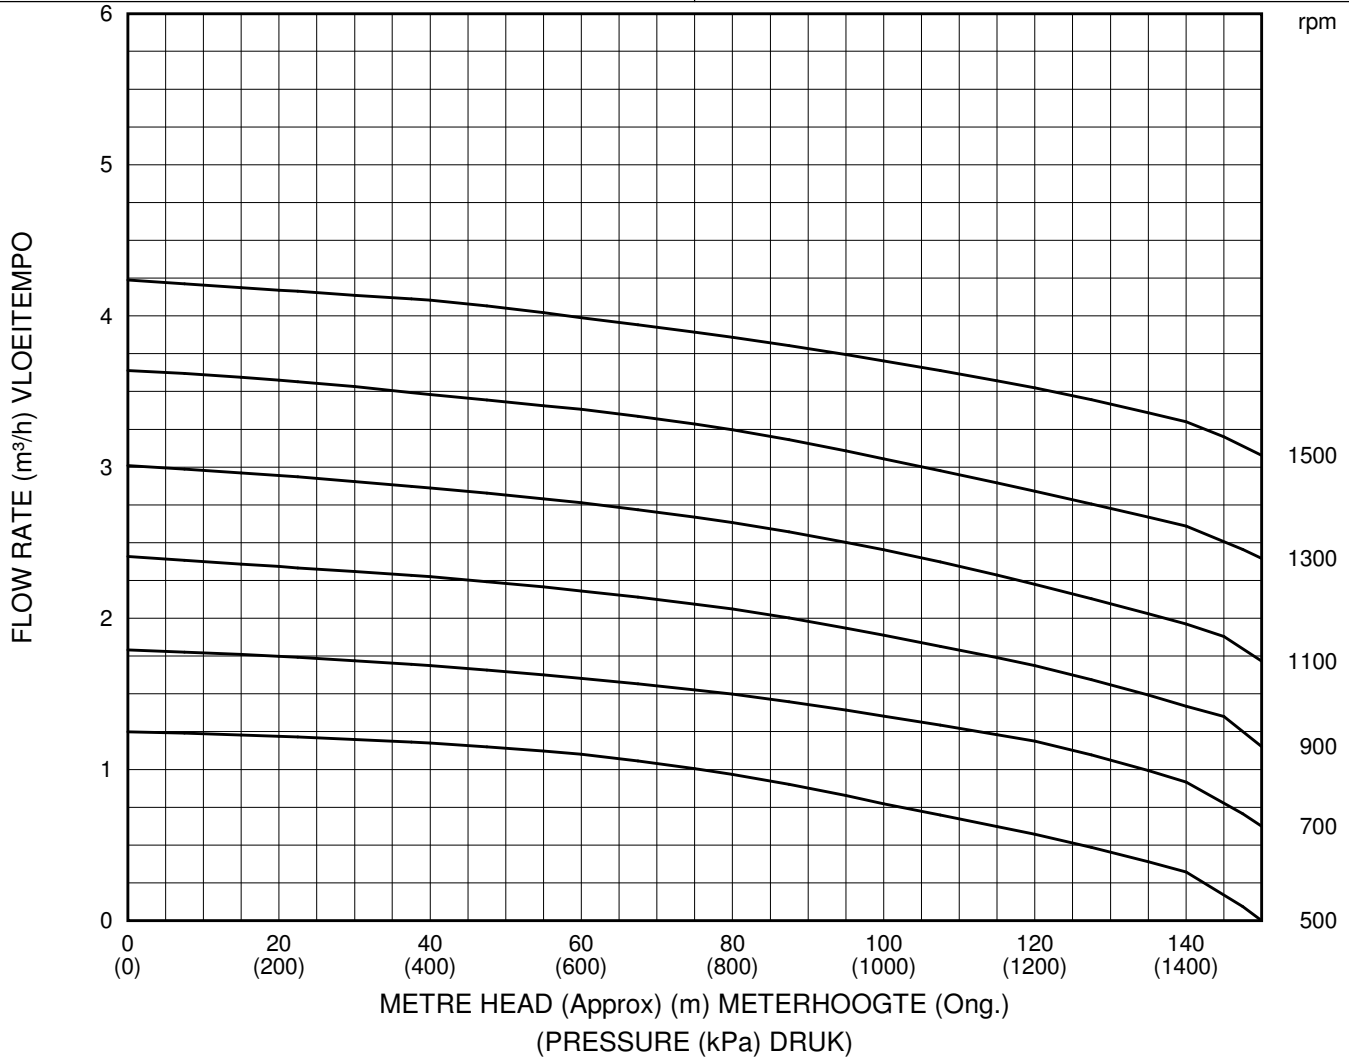



CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



TYPICAL AVERAGE PERFORMANCE
 TIPIESE GEMIDDELDE POMPVERMOË

PUMP POMP
 HP10H

MAX. MAKS	1500 rpm	MAX. DIFF. PRESSURE MAKS. DIFF. DRUK	3000 kPa	INLET DIAMETER INLAAT DEURSNEE	40 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	16.5 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	40 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

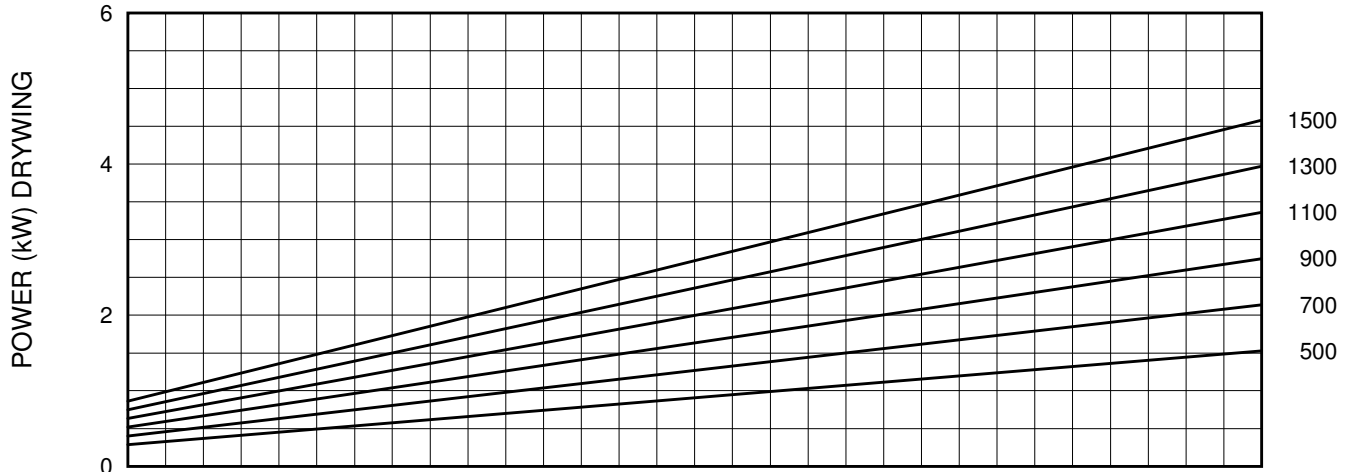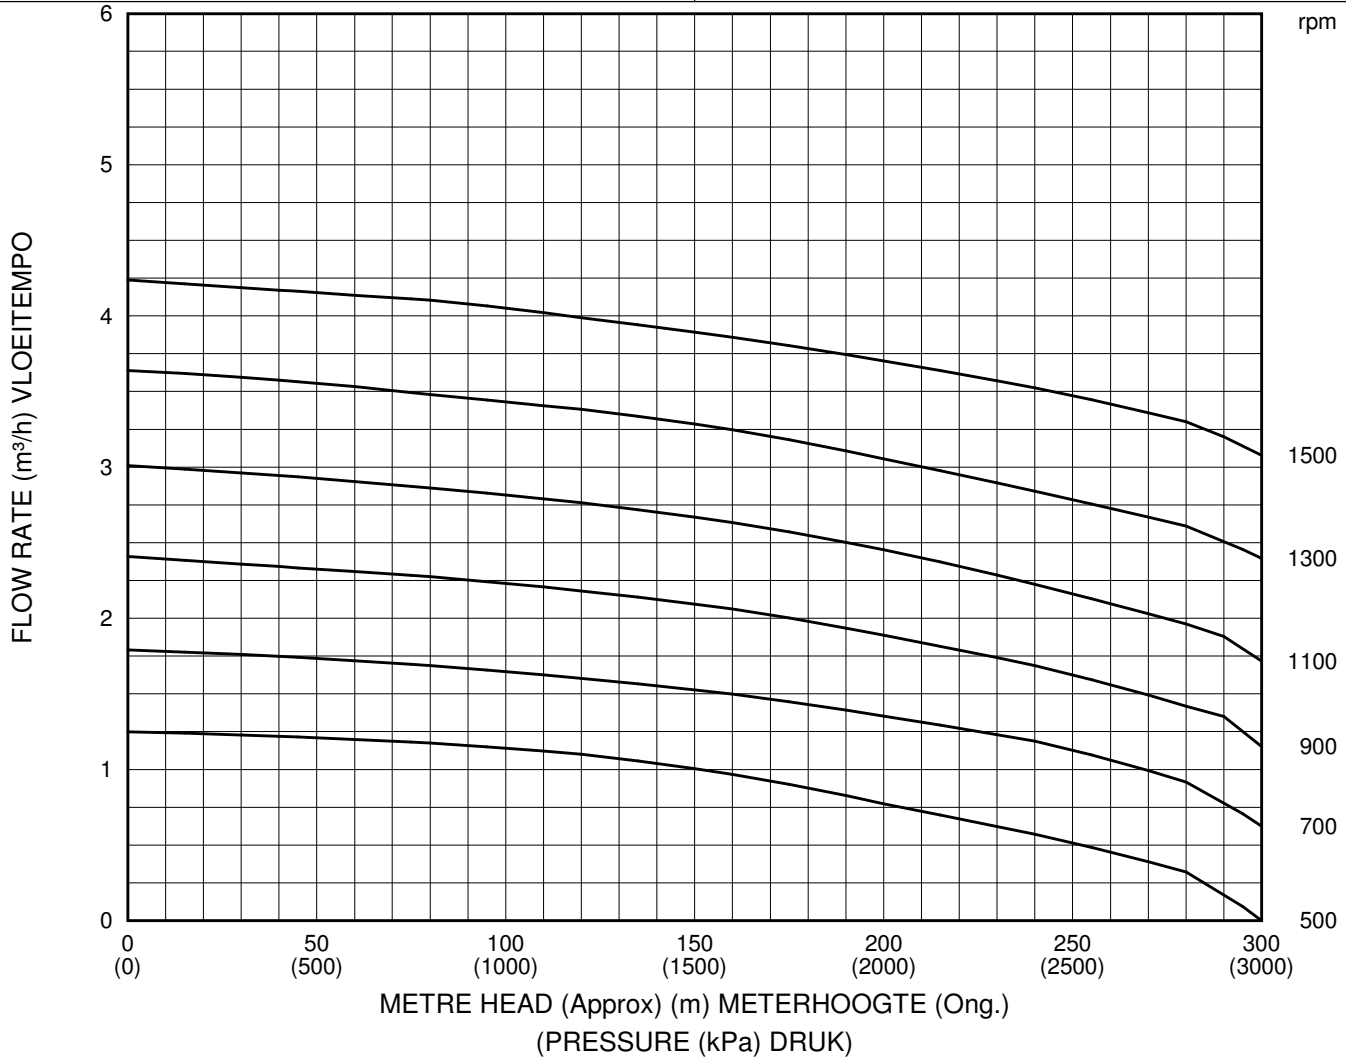



CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



TYPICAL AVERAGE PERFORMANCE
 TIPIESE GEMIDDELDE POMPVERMOË

PUMP POMP
 HP15S

MAX. MAKS	1500 rpm	MAX. DIFF. PRESSURE MAKS. DIFF. DRUK	750 kPa	INLET DIAMETER INLAAT DEURSNEE	40 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	9 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	40 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

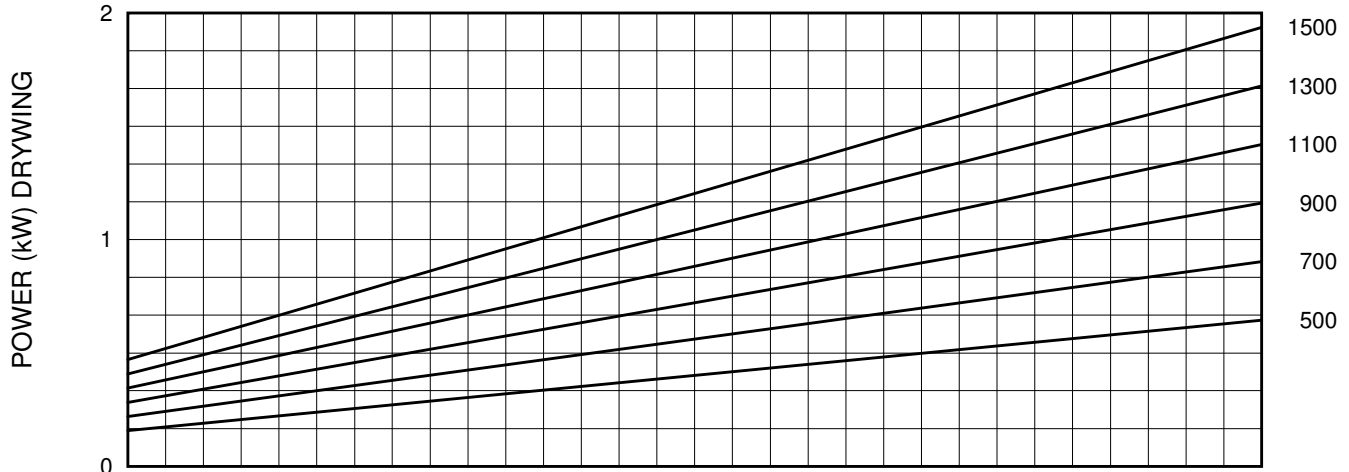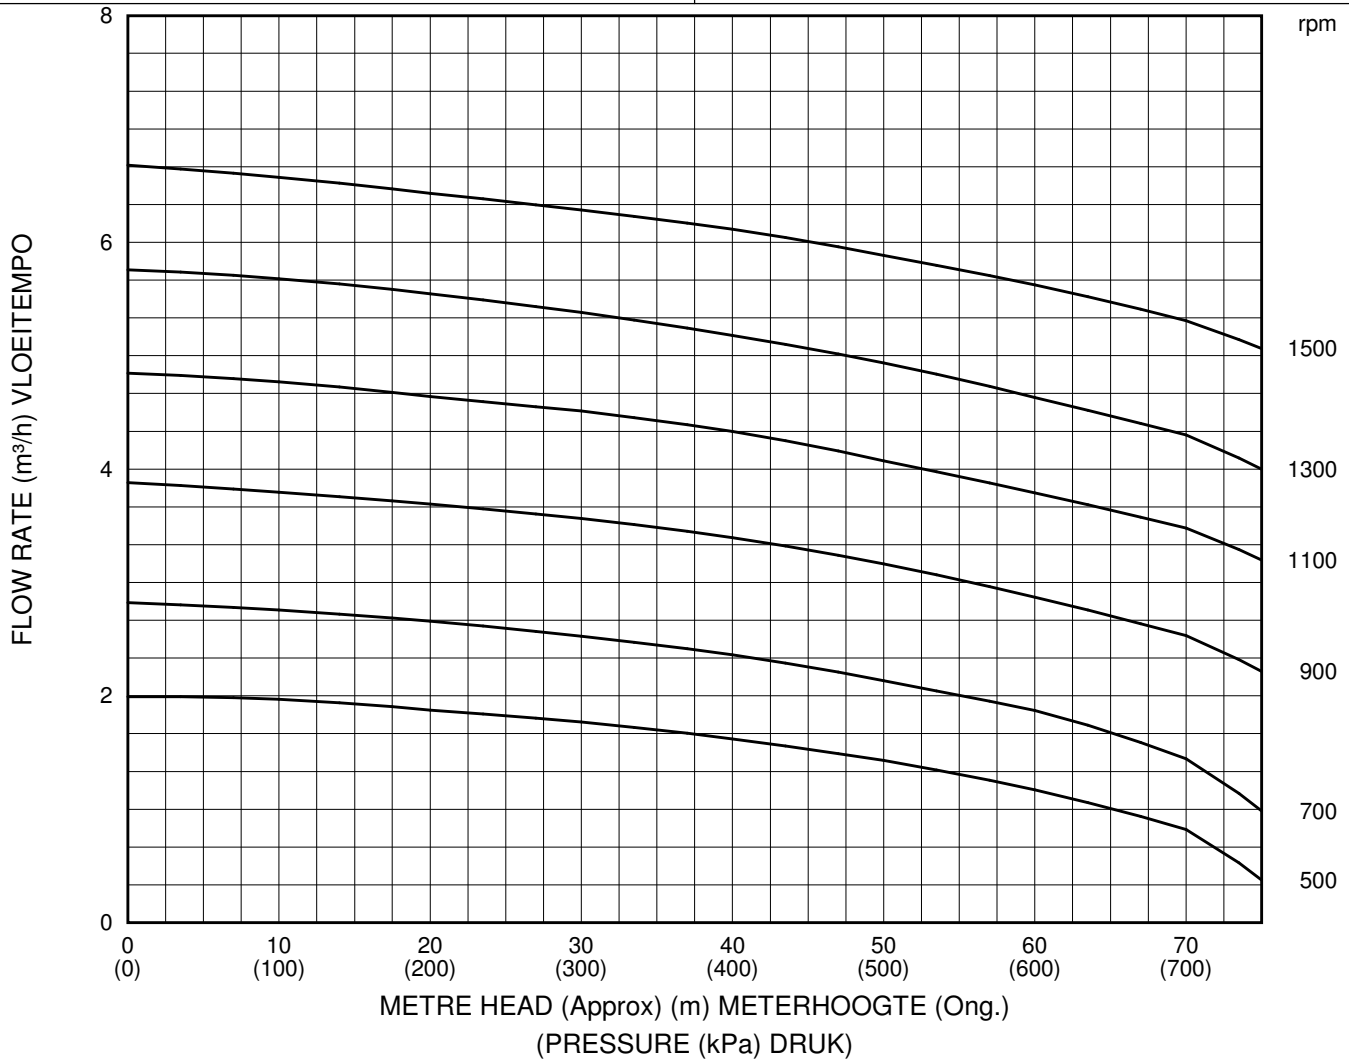



CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË

PUMP
POMP HP15

MAX MAKS	1500 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	1500 kPa	INLET DIAMETER INLAAT DEURSNEE	40 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	13 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	40 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

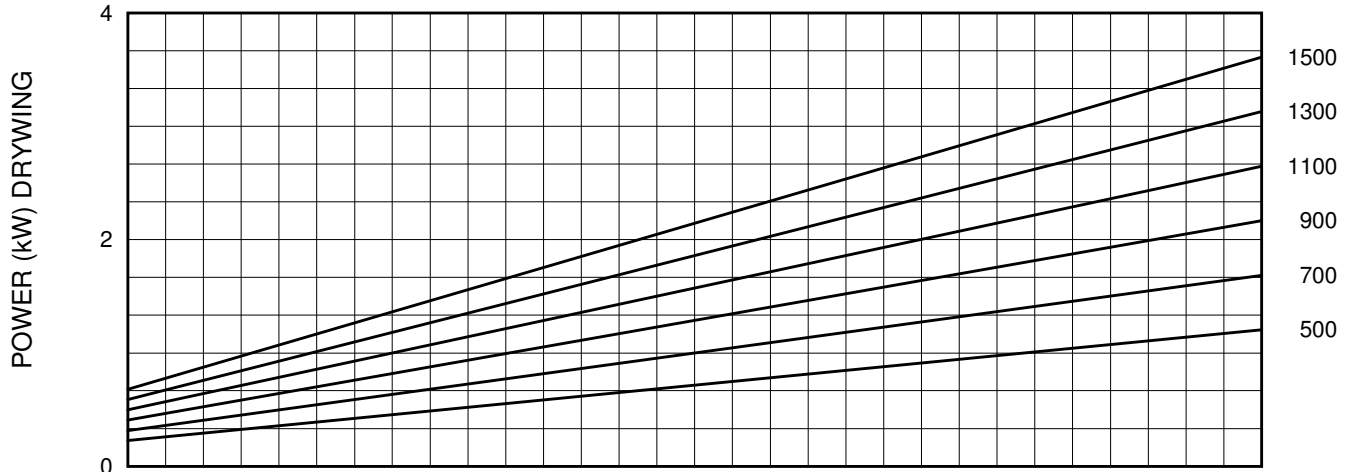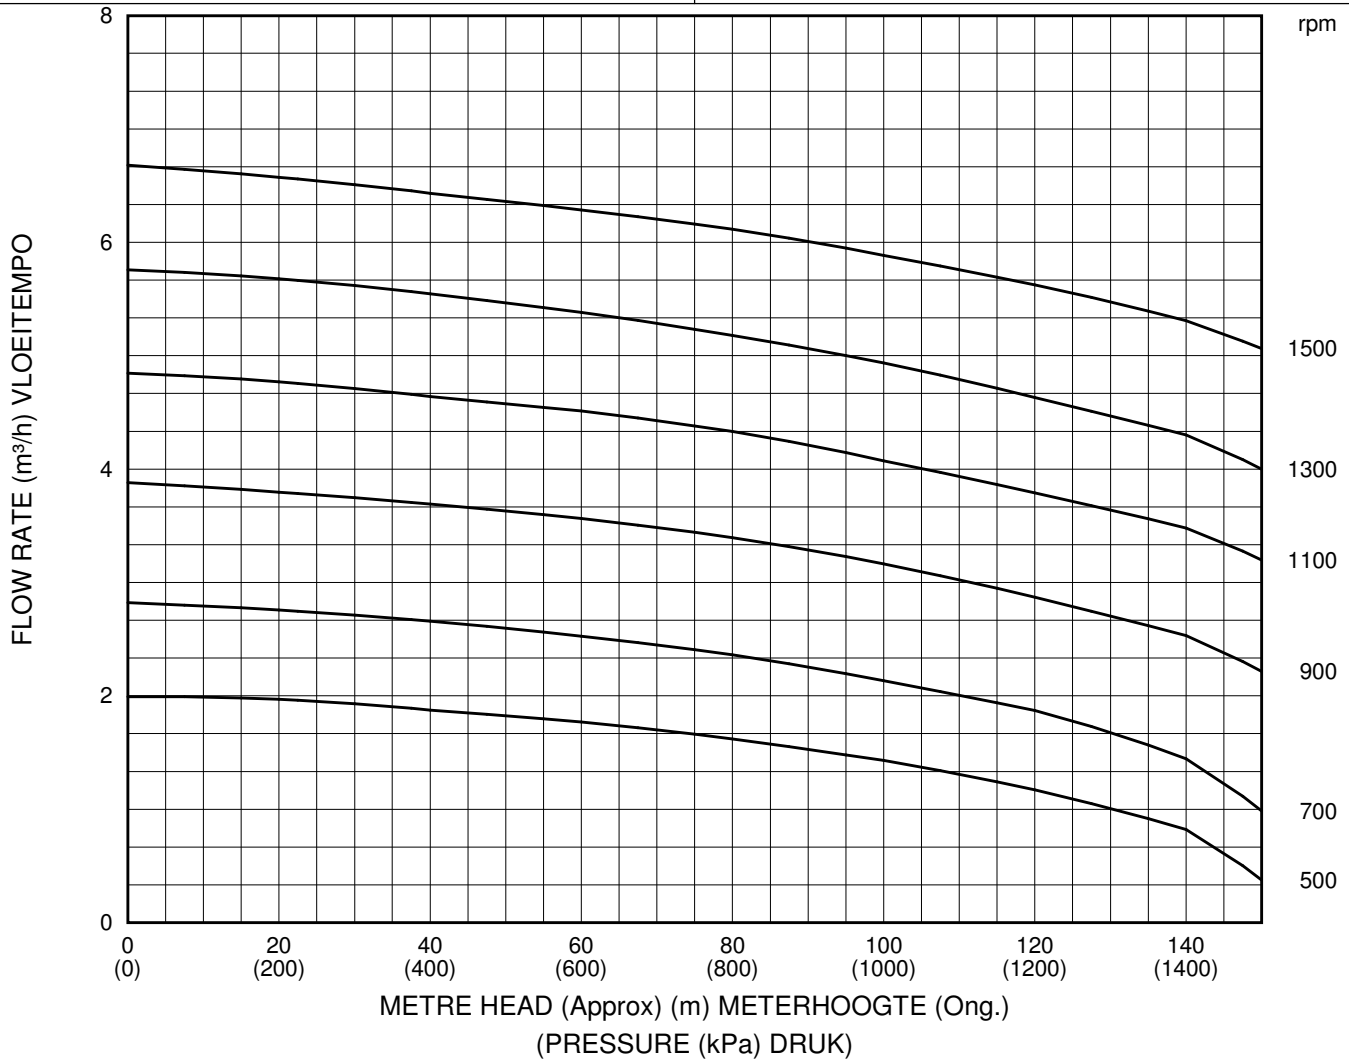



CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



TYPICAL AVERAGE PERFORMANCE
 TIPIESE GEMIDDELDE POMPVERMOË

PUMP POMP
 HP15H

MAX. MAKS	1500 rpm	MAX. DIFF. PRESSURE MAKS. DIFF. DRUK	3000 kPa	INLET DIAMETER INLAAT DEURSNEE	40 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	21 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	40 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

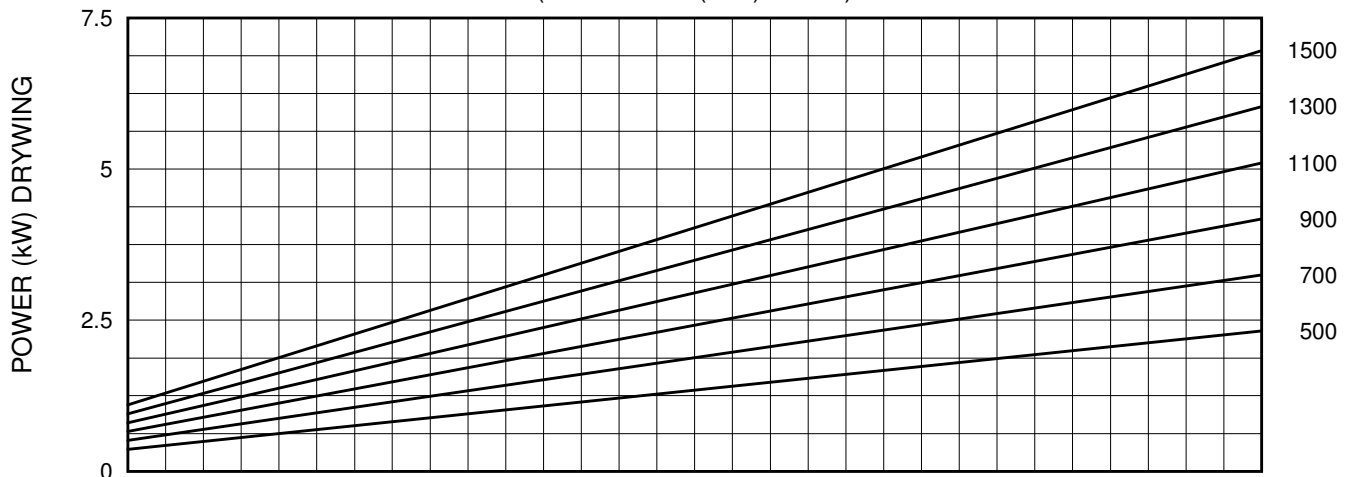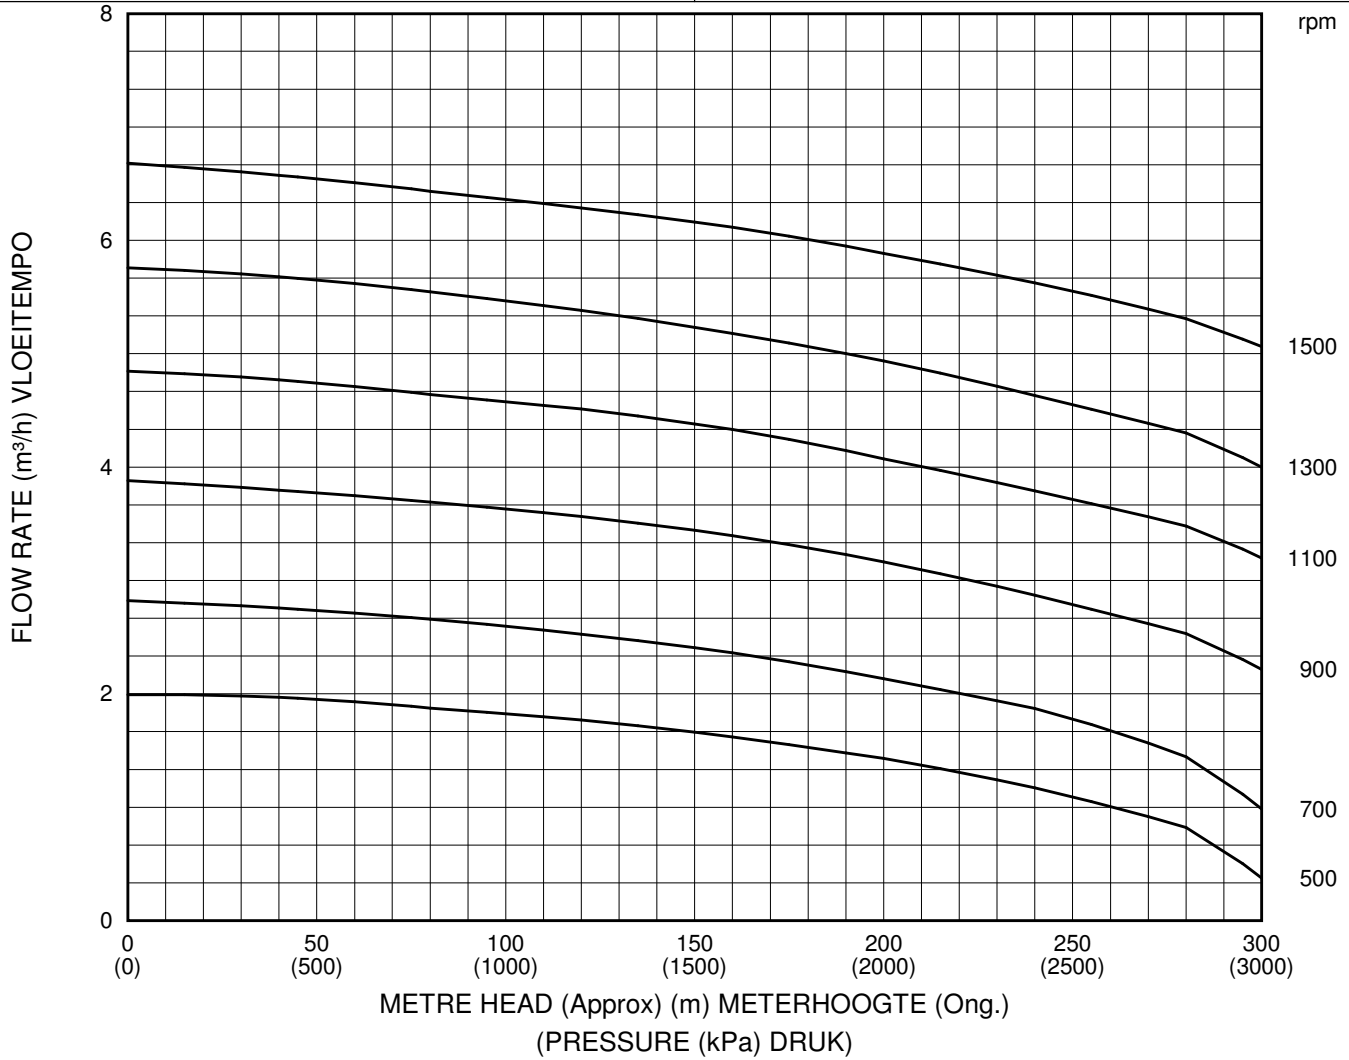



CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË

PUMP
POMP HP30S

MAX MAKS	1300 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	750 kPa	INLET DIAMETER INLAAT DEURSNEE	50 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	12.5 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	50 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

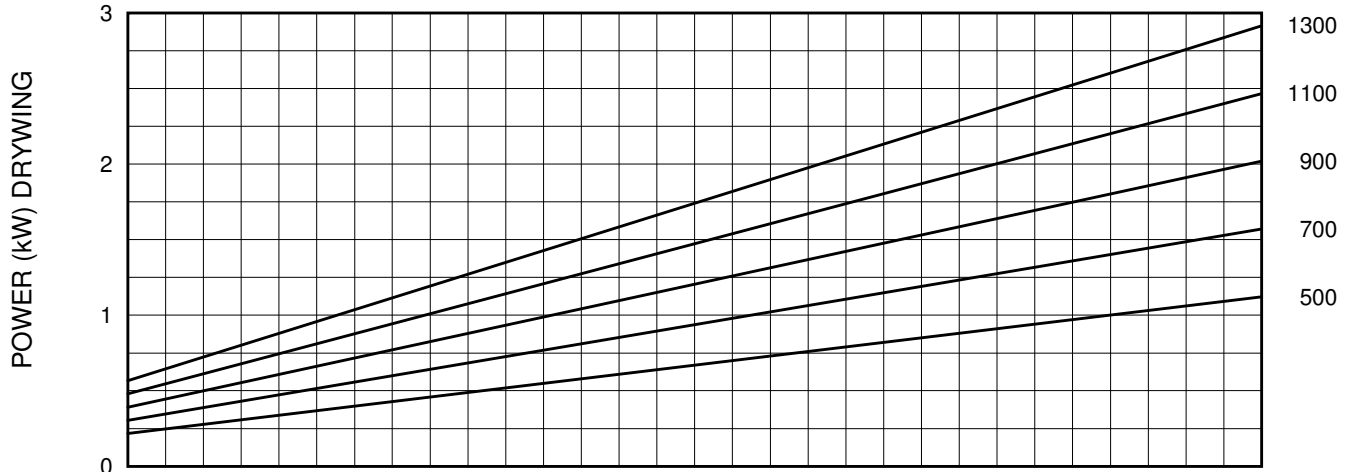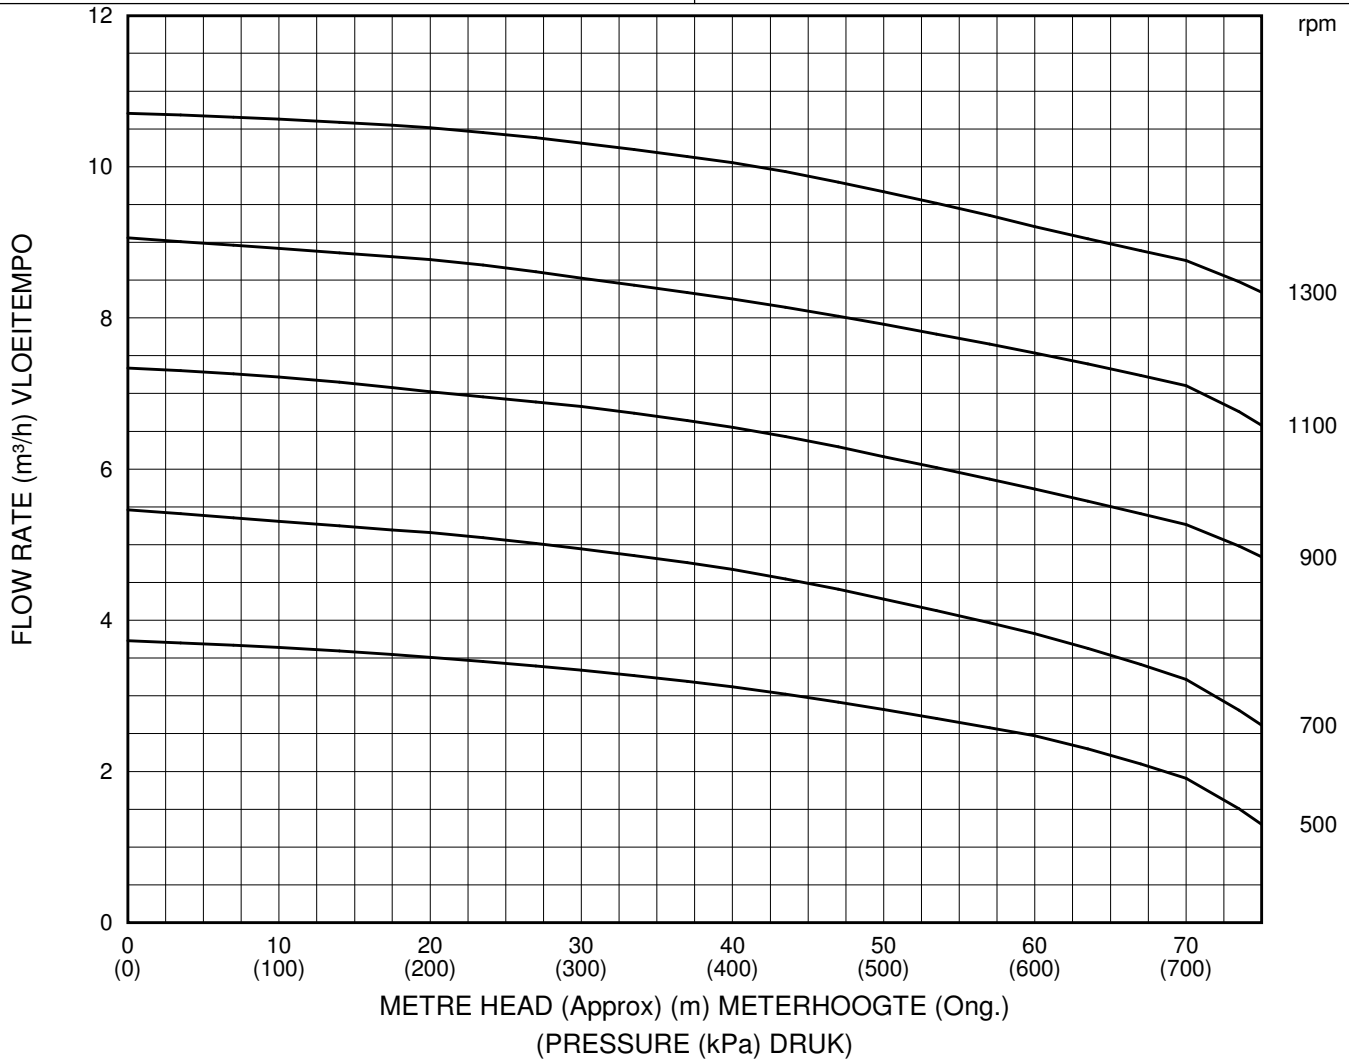





CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance

TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË				PUMP POMP	HP30
MAX MAKS	1300 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	1500 kPa	INLET DIAMETER INLAAT DEURSNEE	50 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	20 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	50 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

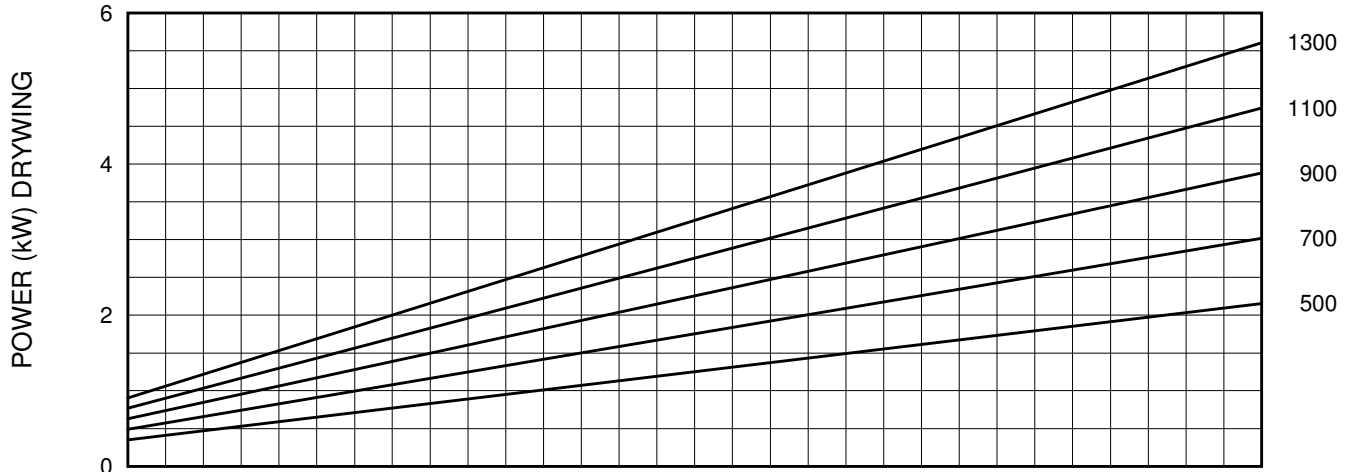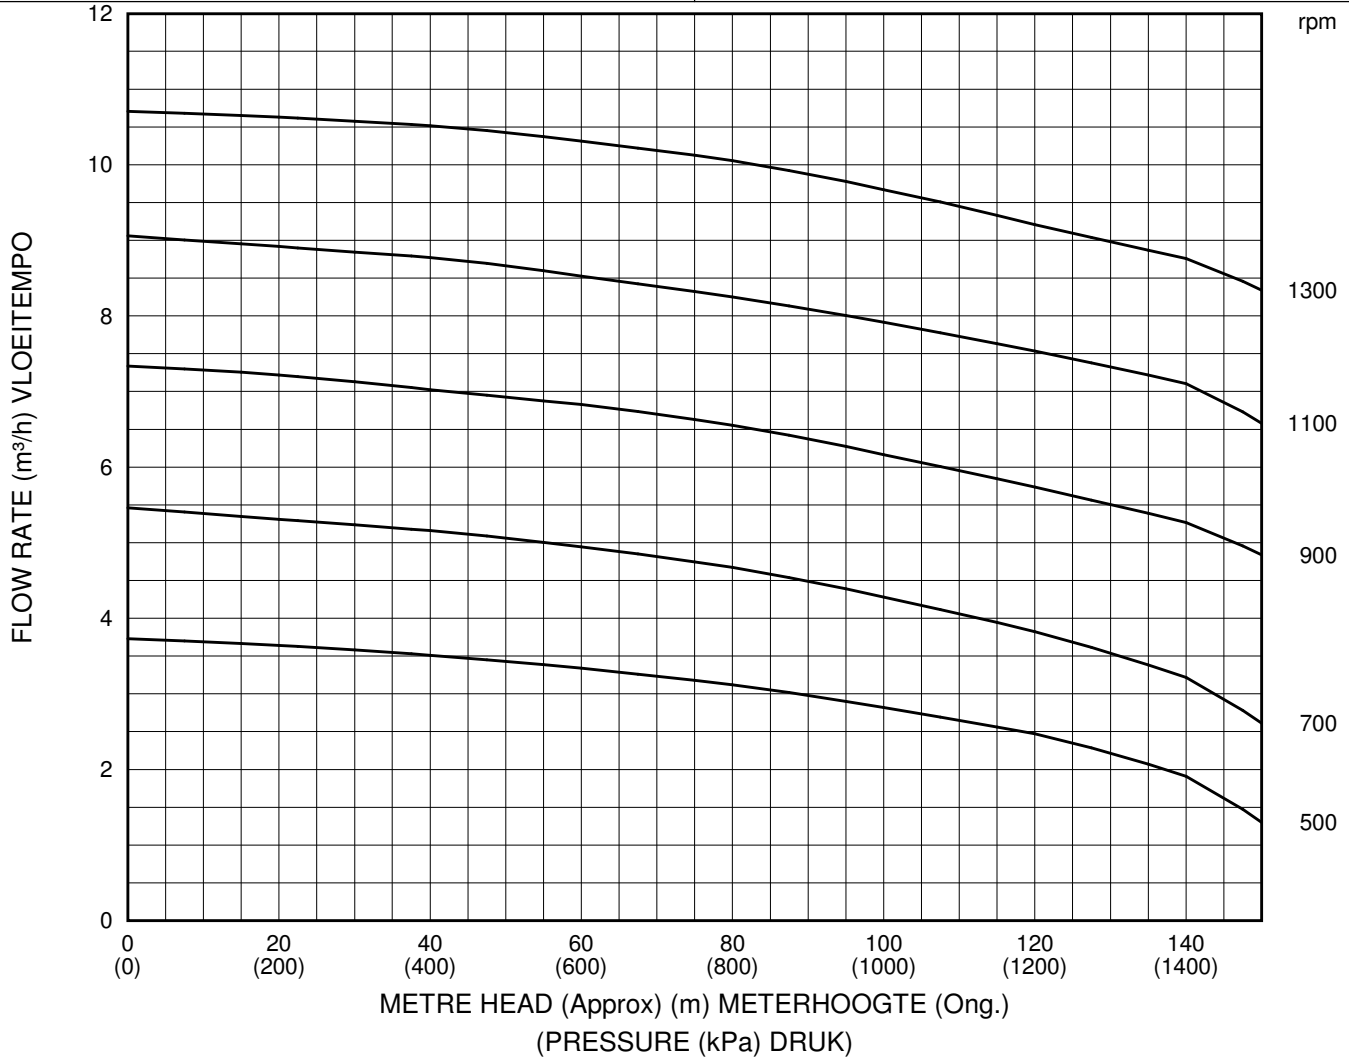





CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance

TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË				PUMP POMP	HP50
MAX MAKS	1300 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	1500 kPa	INLET DIAMETER INLAAT DEURSNEE	50 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	22.5 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	50 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

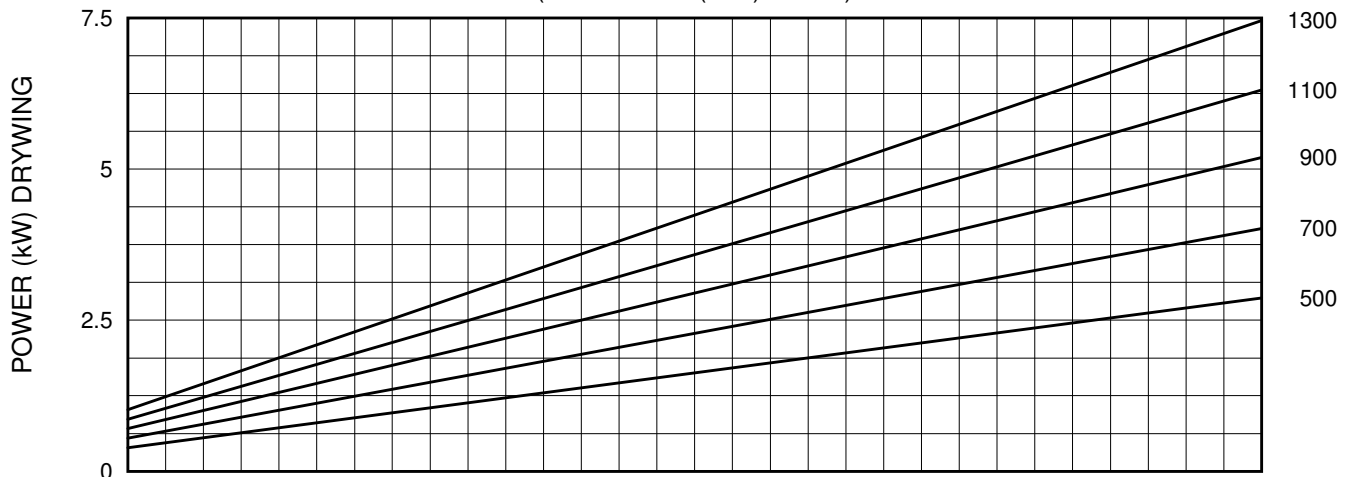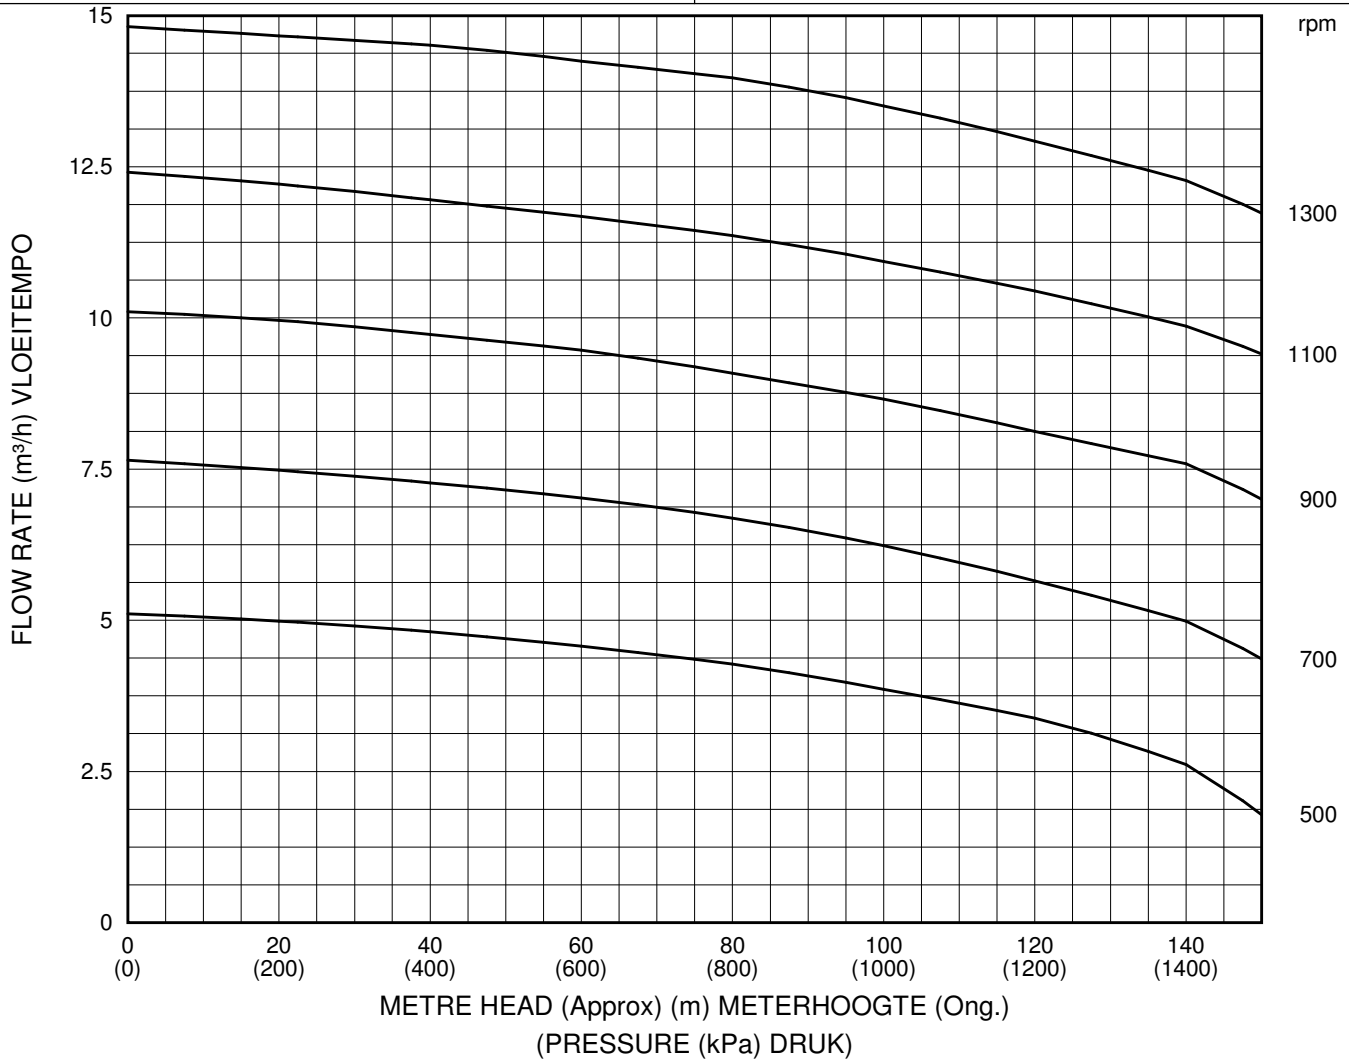



CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË

PUMP
POMP HP50H

MAX MAKS	1300 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	3000 kPa	INLET DIAMETER INLAAT DEURSNEE	50 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	39 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	50 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

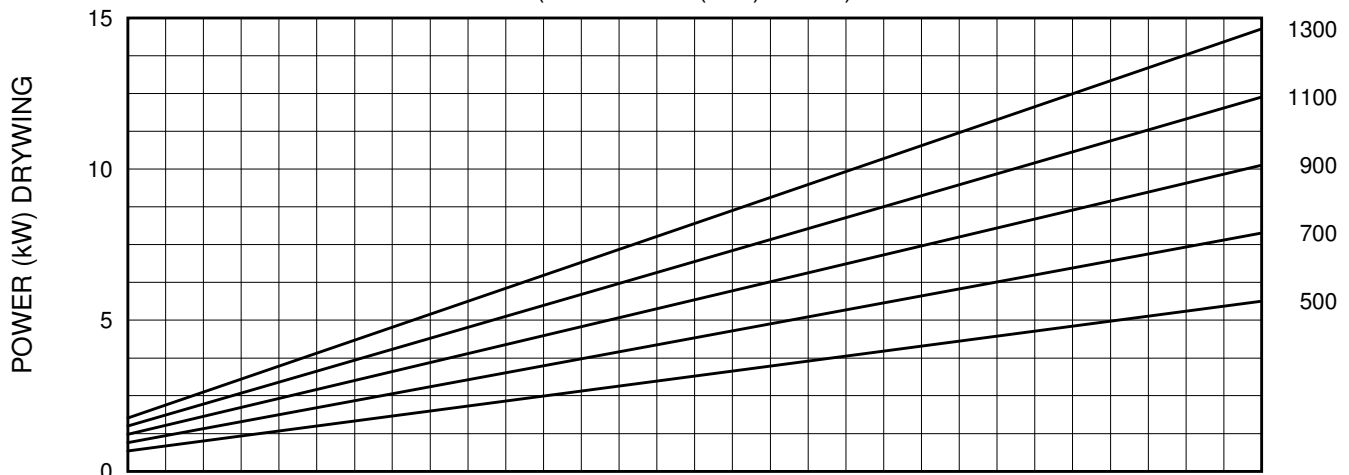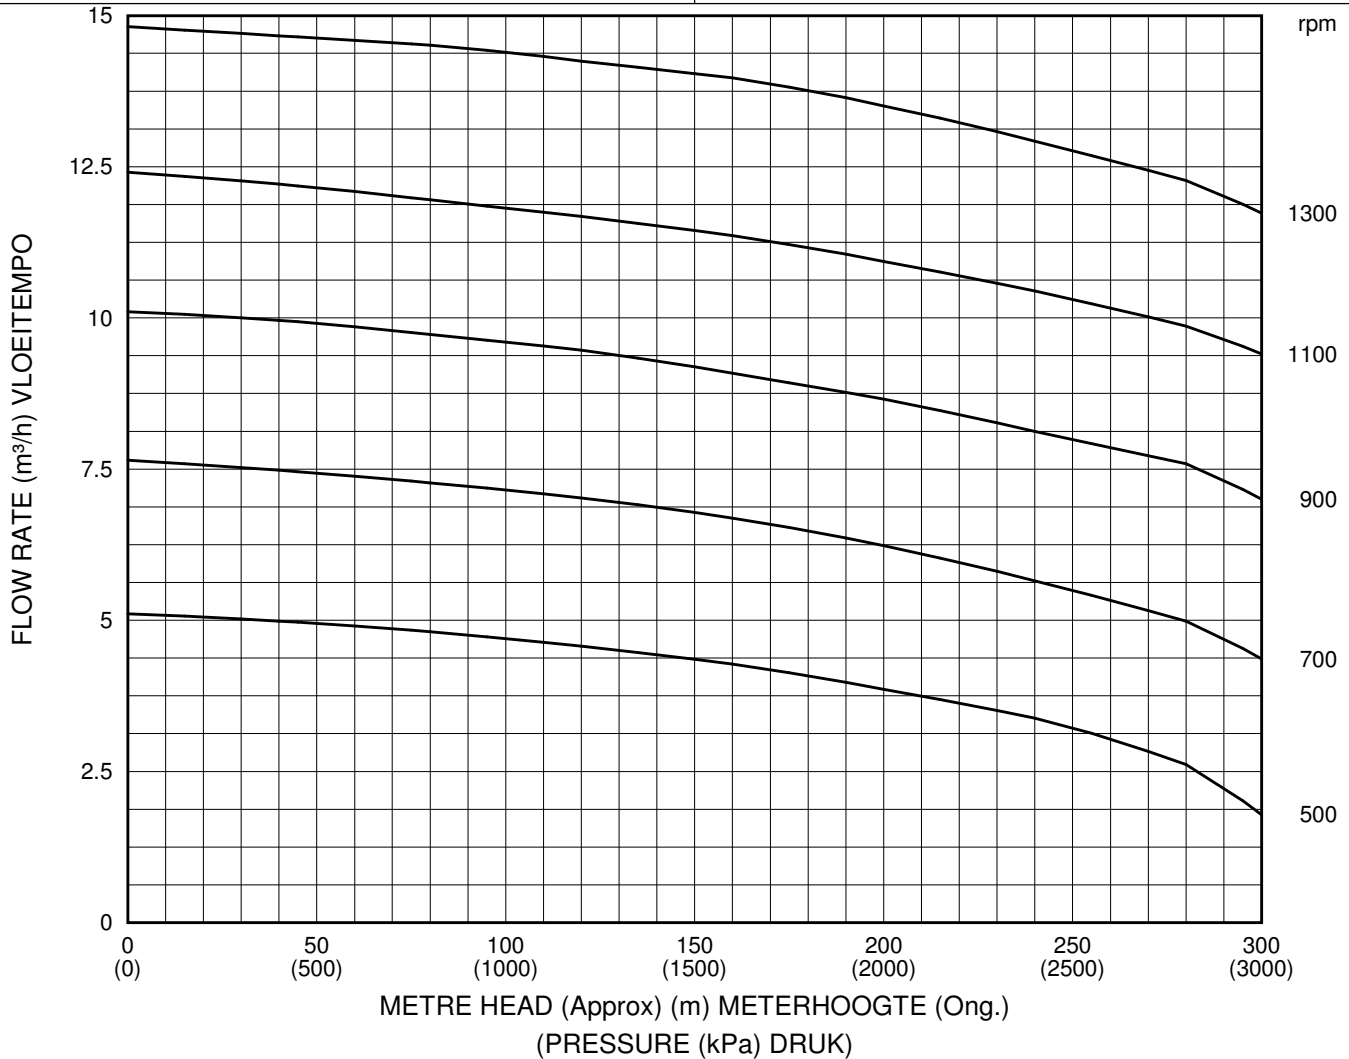



CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË

PUMP POMP **HP115**

MAX. MAKS	1300 rpm	MAX. DIFF. PRESSURE MAKS. DIFF. DRUK	1500 kPa	INLET DIAMETER INLAAT DEURSNEE	80 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	37.5 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	80 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

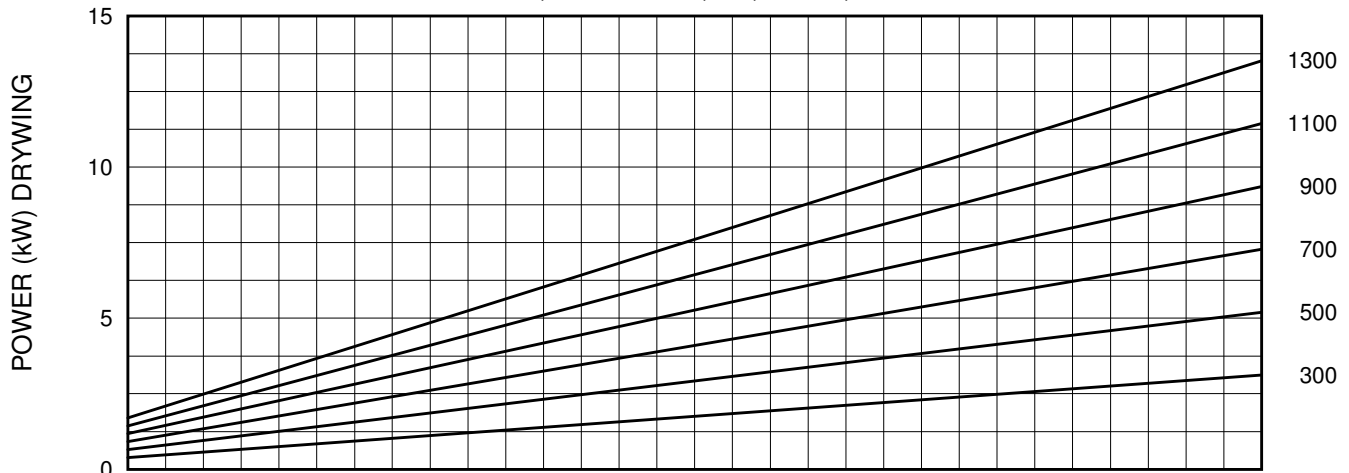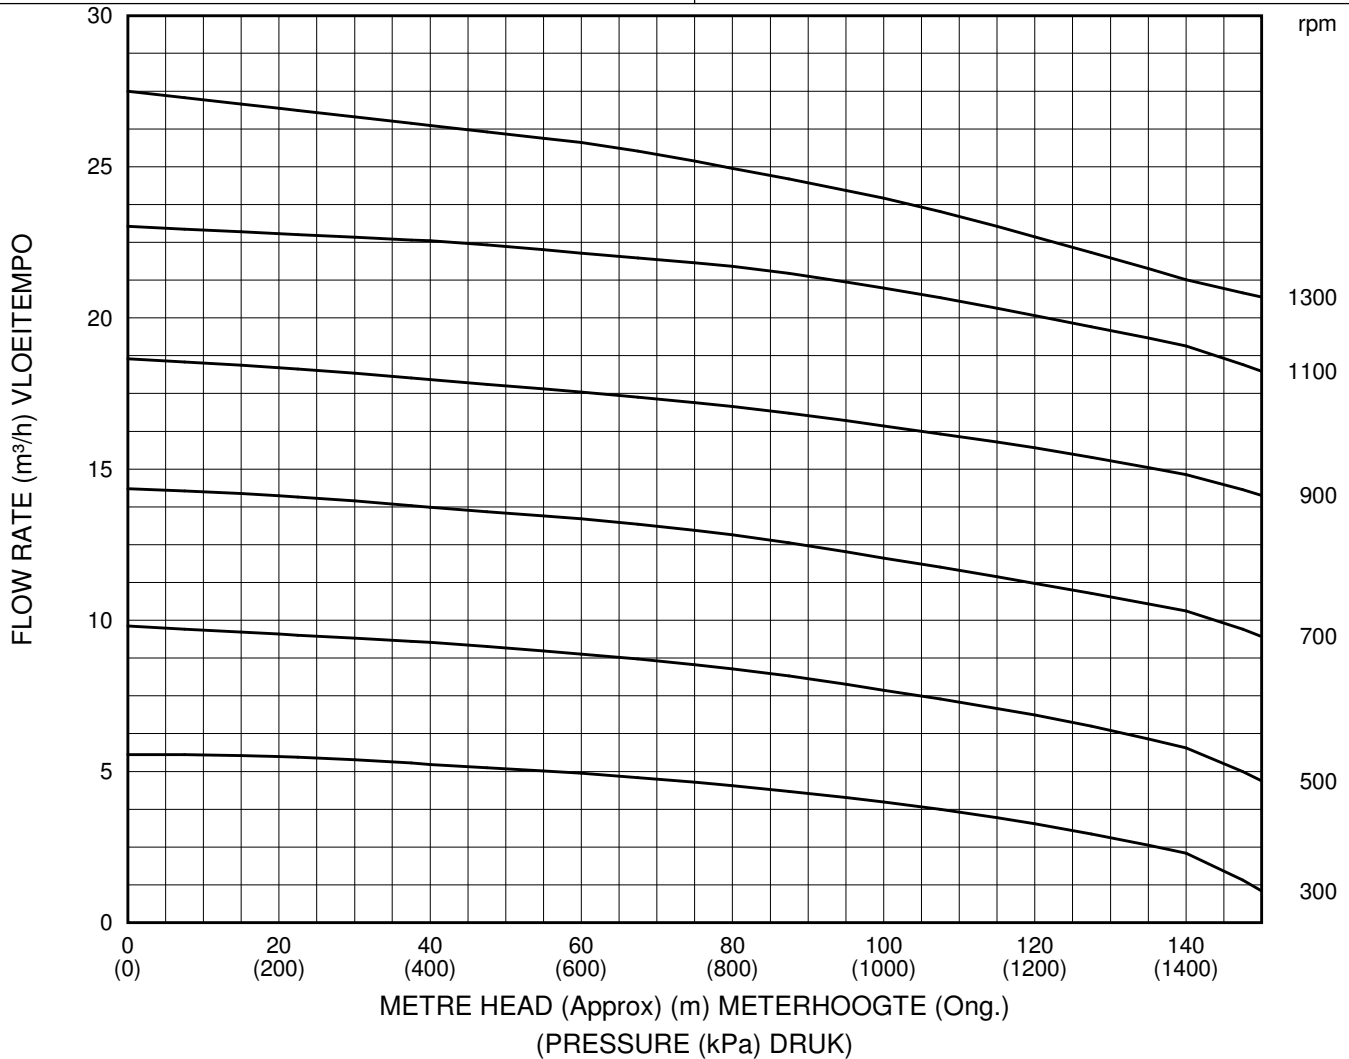



CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance



TYPICAL AVERAGE PERFORMANCE
 TIPIESE GEMIDDELDE POMPVERMOË

PUMP
 POMP HP115H

MAX MAKS	1300 rpm	MAX. DIFF PRESSURE MAKS. DIFF DRUK	3000 kPa	INLET DIAMETER INLAAT DEURSNEE	80 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	78 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	80 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

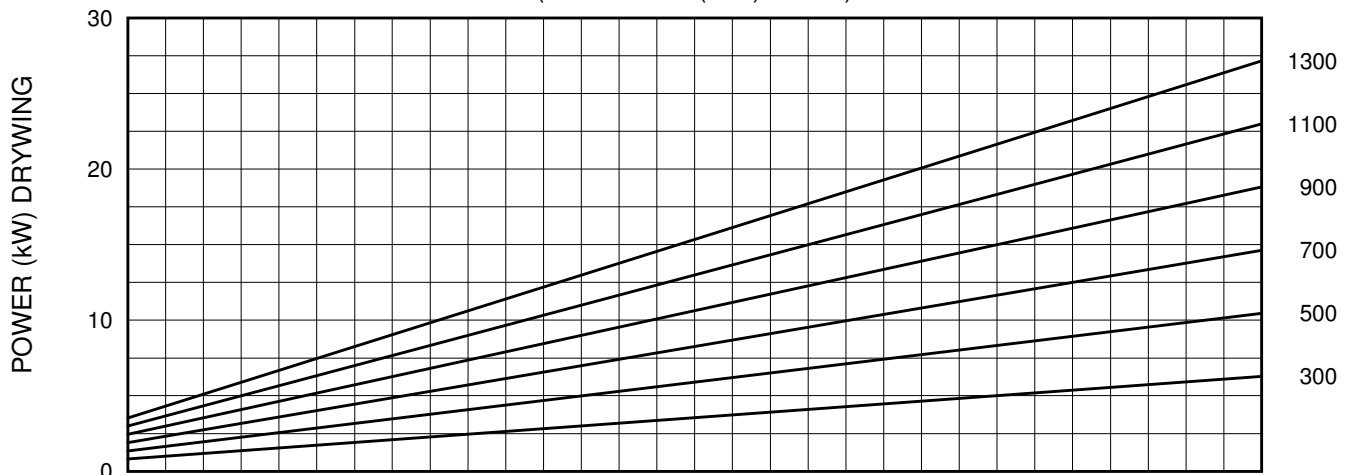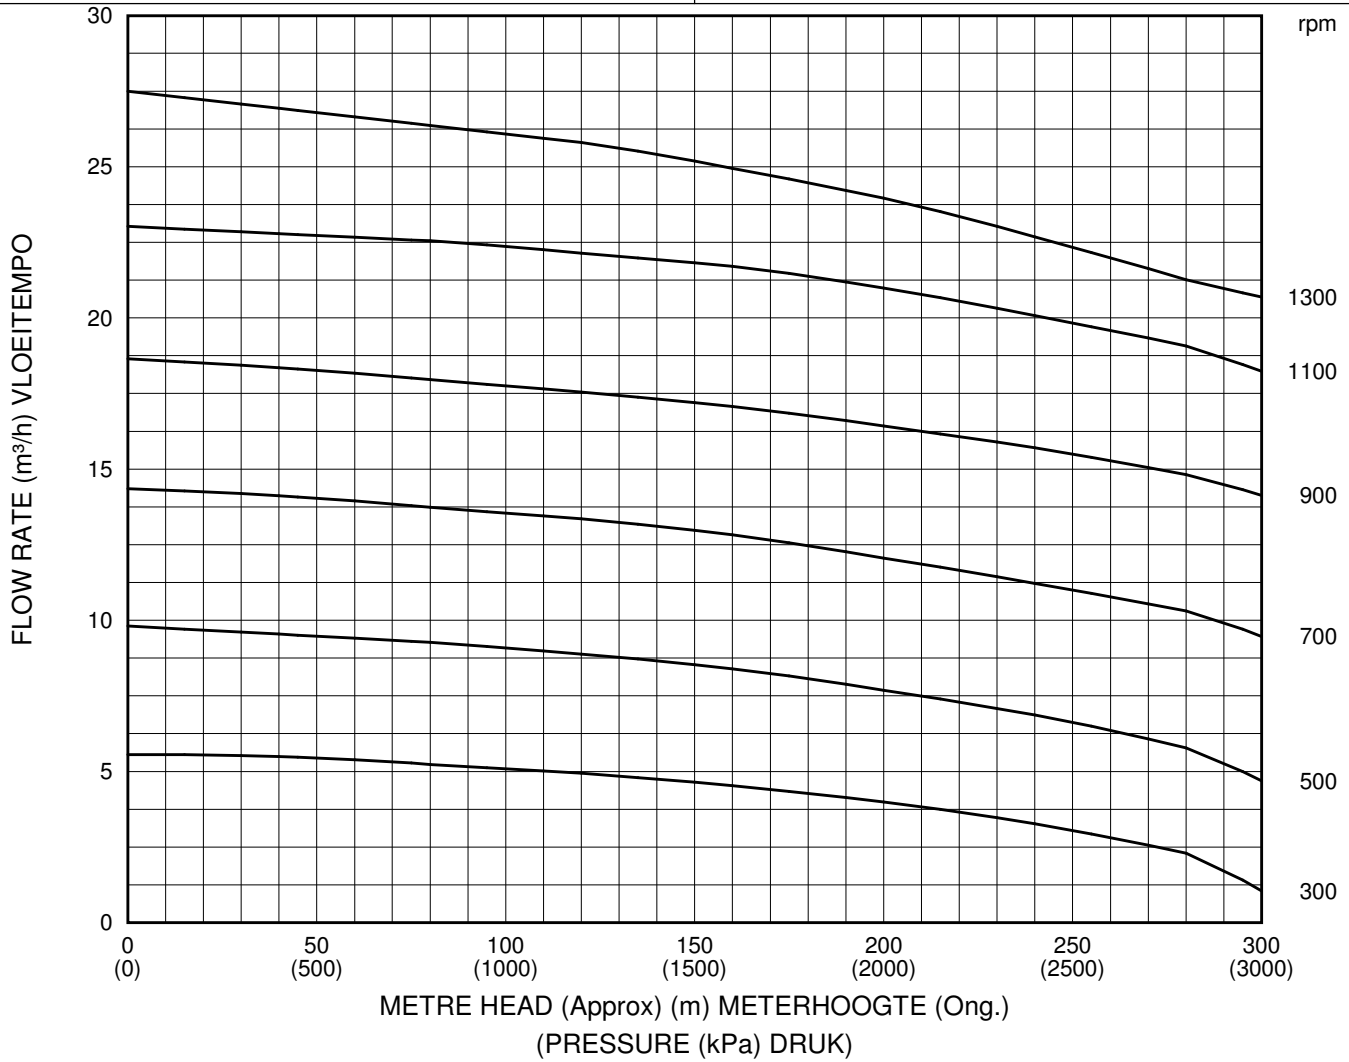



CEMO PUMPS

Part of the Crown Group of Companies - Traditional Quality & Performance

TYPICAL AVERAGE PERFORMANCE TIPIESE GEMIDDELDE POMPVERMOË

PUMP POMP **HP250**

MAX. MAKS	900 rpm	MAX. DIFF. PRESSURE MAKS. DIFF. DRUK	1500 kPa	INLET DIAMETER INLAAT DEURSNEE	100 mm
ROTATION ROTASIE	Anti-Clock	MIN. STARTING TORQUE MIN. DRAAIMOMENT	87 N.m	OUTLET DIAMETER UITLAAT DEURSNEE	100 mm

TESTED ON WATER AT 20°C

GETOETS OP WATER TEEN 20°C

