

# Saunders®




## STRAIGHT-THROUGH TYPE KB DIAPHRAGM VALVES



# Straight-Through Type KB Diaphragm Valves

## THE ORIGINAL AND THE BEST

PK Saunders invented the original diaphragm valve in 1928 in the then known West Rand gold fields of Johannesburg. Since then, we have developed our range through innovative designs and by using the latest materials technology. As a result, Saunders diaphragm valves have gained an excellent reputation for versatility and reliability establishing a presence in the mining and every process industry sector. Today there are millions of Saunders diaphragm valves, manufactured by Dynamic Fluid Control and supplied by our distribution partners to South and Southern African markets.

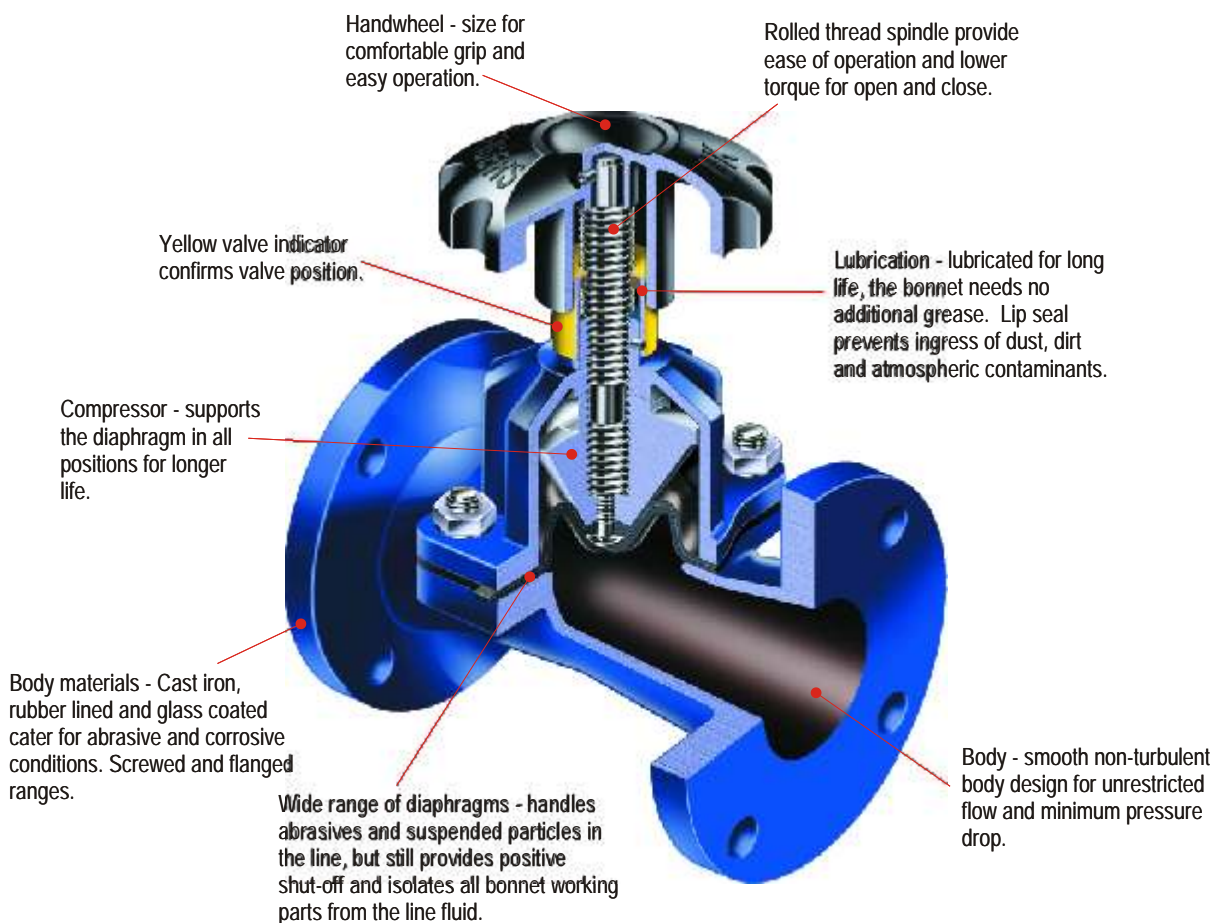

### STRAIGHT THROUGH BORES

Saunders full bore KB type valve, with their smooth non-turbulent body design have proved to be outstanding in resisting the erosive affects of corrosive/abrasive line media. In addition, the full bore concept is designed for minimum flow resistance whilst allowing rodding out and easy cleaning.

The flexible diaphragms ensure consistent leak tightness even when solids, powders and dry media are present. A range of rubber linings are available for the more exacting corrosive and abrasive applications to a maximum working pressure of 10 bar.

#### VALVE USABLE IN ANY POSITION

The KB valve can be installed in any position without affecting its operation. We recommend six times pipe diameter from pump or bend.



#### LUBRICATION

Bonnet assembly lubricated for long life. Needs no further grease. The indicator lip seal stops the ingress of dust, dirt and atmospheric contaminates.


### EASE OF MAINTENANCE

Three part design allows maintenance and actuator retrofitting without removing the valve body from the pipeline. Extended life, reliability and safety, combined with essentially simple design, result in low maintenance and low cost of ownership.


## SAUNDERS KB TYPE DESIGN WITH RHI BONNET

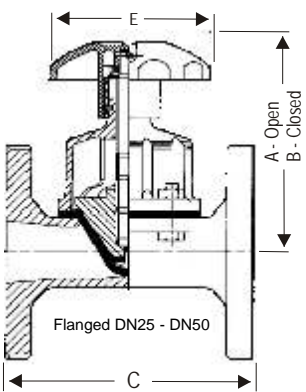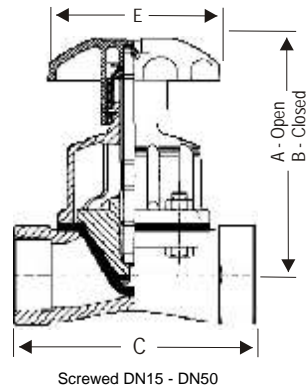

RHI (Rising Handwheel Indicator)

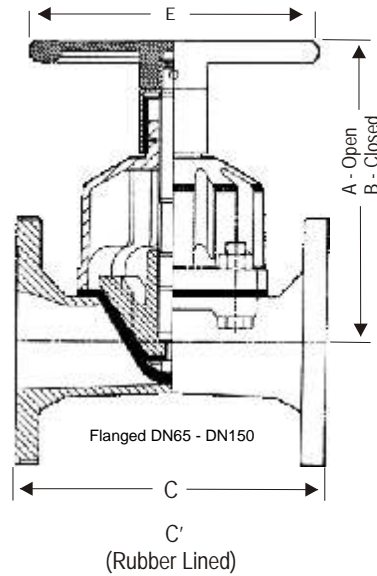

Non - Rising Handwheel

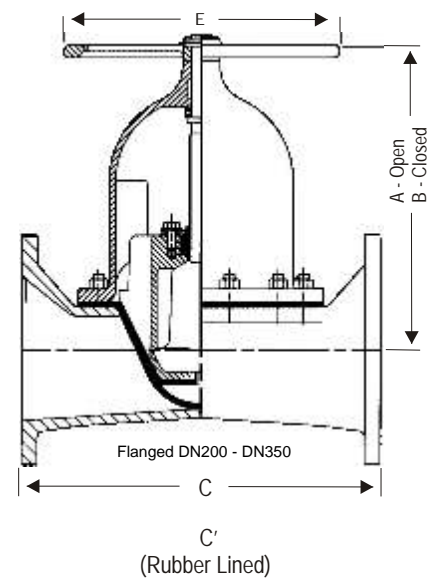

### FEATURES AND BENEFITS OF THE KB BODY WITH RHI BONNET

- \* Straight through body, high flow, low pressure drop
- \* Low maintenance
- \* Rising handwheel indicator
- \* Immediate indication of open/close position
- \* Leak tight by design
- \* Flexible closure even with solids present
- \* Only two wetted parts
- \* Bonnet working parts isolated from line media

- \* Specially developed linings and diaphragms available
- \* Indicator sleeve (lubrication reservoir)
- \* Rolled thread spindle
- \* More compact than the previous model
- \* Better resistance to corrosion/abrasion due to the sealed bonnet
- \* Weighs less for easy handling
- \* Space saver for difficult installations
- \* Lower open and closing torques


### VALVE SIZE - DN

		15	25	32	40	50	65	80	100	125	150	200	250	300	350
Screwed	A	-	166	166	166	185	-	-	-	-	-	-	-	-	-
	B	-	159	159	159	165	-	-	-	-	-	-	-	-	-
	C	-	111	124	143	168	-	-	-	-	-	-	-	-	-
	Aprox Weight	-	2	3	4	6	-	-	-	-	-	-	-	-	-
Flanged	A	-	163	163	163	185	224	273	321	347	447	-	-	-	-
	B	-	157	157	157	165	200	240	285	305	385	415	560	640	680
	C	108	127	146	159	190	216	254	305	356	406	521	635	749	980
	C'	-	133	152	165	196	222	260	310	362	412	527	641	755	986
	Aprox Weight	2	4	5	6	11	15	23	31	46	67	110	200	300	400
E	80	120	120	120	120	200	250	250	315	400	400	500	630	720	
Operating Pressure - bar	10	10	10	10	10	10	10	10	10	6	6	3.5	3.5	3.5	1.5

## A VALVE PACKAGE FOR CORROSIVE AND ABRASIVE APPLICATIONS

GUIDE TO BODY (LININGS) APPLICATIONS		RANGE AVAILABILITY	
BODY / LINING	TYPICAL APPLICATIONS	SIZE	TEMP °C
Cast Iron Ductile Iron (SG)	Strength, low cost non corrosive duties	DN15-DN350	-20° to 175°
Rubbers - Soft (AAL) - Hard (Ebonite) (HRL) - Butyl (BL) - Neoprene (NL)	Economic handling of corrosive & abrasive media Abrasive duties Acid, chlorinated water, moist chlorine Mineral acids, & slurries Abrasive duties where hydrocarbons are present	DN25 - DN350	-10° to 85° -10° to 85° -10° to 110° -10° to 105°
Borosilicate Glass	Excellent for strong acids, halogens	DN25 - DN200	-10° to 175°
Halar™	Excellent resistance to mineral and oxidising acids inorganic bases, salts	DN25 - DN350	-10° to 150°
Fusion Bonded Epoxy FBE	Potable water applications	DN25 - DN350	-20° to 80°

Halar™ is the registered trademark of AUSIMONT UK Ltd

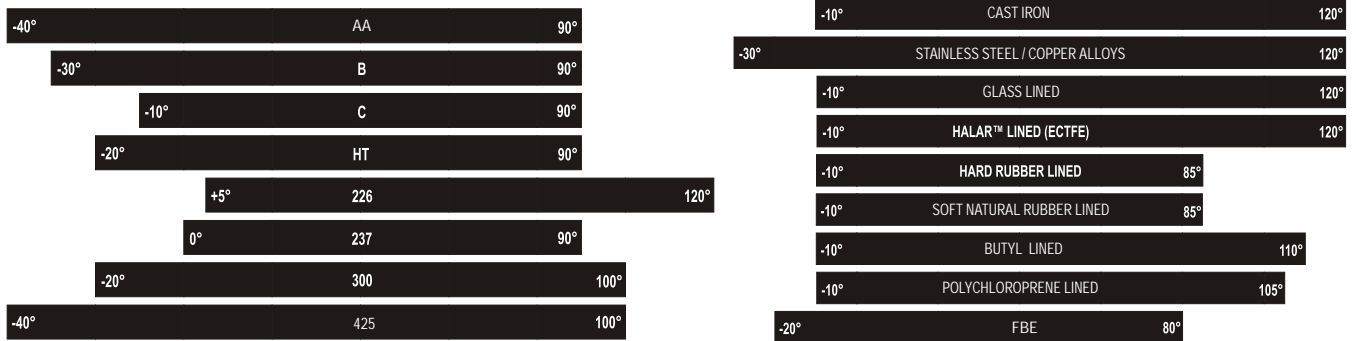

## SAUNDERS DIAPHRAGMS VALVES - A UNIQUE DESIGN, SEALED FROM THE SERVICE AND PROOFED AGAINST CORROSION AND EROSION IN HOSTILE ENVIRONMENTS

GUIDE TO DIAPHRAGM APPLICATIONS		RANGE AVAILABILITY	
GRADE	TYPICAL APPLICATIONS †	SIZE	TEMP °C
<b>A</b>	Abrasives in slurry or dry powder form.	DN15 - DN350	- 40° to 90°
<b>B</b>	Acid and alkalis. Up to 85% sulphuric acid at ambient temperatures. Hydraulic hydrochloric phosphoric acids, caustic alkalis and many esters. Sea water, very low vapour and gas permeability. Insert gases and many industrial gases.	DN15 - DN350	- 30° to 90°
<b>C</b>	Salts in water, dilute acids and alkalis, abrasives.	DN15 - DN350	- 10° to 90°
<b>226</b>	Paraffinic and aromatic hydrocarbons, acids, particularly concentrated sulphuric and chlorine applications. Not recommended for ammonia and its derivatives or for polar solvents, e.g. acetone.	DN15 - DN250	- 5° to 140°
<b>237</b>	Good acid and ozone resistance certain chlorine services.	DN15 - DN350	- 0° to 90°
<b>300</b>	For hot water services applications involving steam sterilisations, therefore, ideally suited for brewing and pharmaceutical applications. For services involving continuous high temperature/pressure combinations consult our technical department.	DN15 - DN350	- 20° to 120°
<b>425</b>	Salts in water, drinking water.	DN15 - DN350	- 40° to 100°

Key to grade letters / materials

A - Natural Rubber	226 - Fluororubber	237 - Hypalon
B - Butyl	300 - Butyl	425 - Epdm
C - Nitrile		



**Dynamic Fluid Control (Pty) Ltd**

Where every drop counts

P.O. Box 5064, Benoni South 1502, South Africa  
 Tel: +27 (11) 748 0200 Fax: +27 (11) 421 2749  
 Email: sales@dfc.co.za Website: www.dfc.co.za