

Ductile Iron Fittings



For
PVC
Pipes

Fusion Bonded Epoxy Coated



Bitumen Coated




Value, Performance & Quality

PROUDLY SUPPLIED BY

Inclledon
Quality Fluid Conveyance Products


www.inclledon.co.za

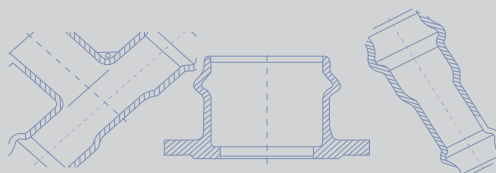

DPI Trading
Quality Fluid Conveyance Products


www.dpitrading.co.za

REDUCING TEES

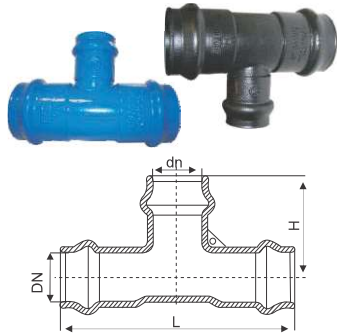

Dimensions		75	75	90	90	110	110	110	160	160	160	160	200	200	200	250	250
DN (mm)		75	75	90	90	110	110	110	160	160	160	160	200	200	200	250	250
dn (mm)		50	63	63	75	63	75	90	63	75	90	110	90	110	160	160	200
H±5 (mm)		130	135	145	150	165	170	190	215	220	225	230	225	235	270	285	295
L±5 (mm)		295	295	275	290	360	335	380	390	410	430	450	470	485	540	563	630
Weight (kg)		4.7	5.0	6.0	6.5	7.8	8.2	8.7	11.8	12.5	13.4	14.5	19.0	20.4	24.2	36.3	38.0
PN (Bar)		16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16


HYDRANT TEES

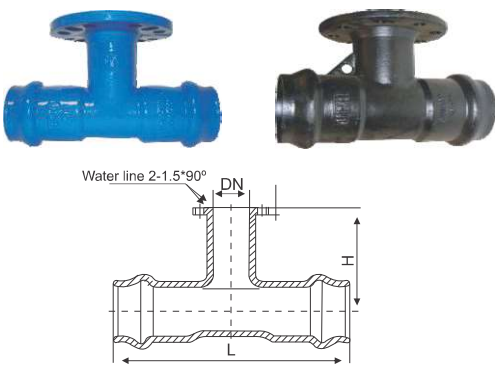

Dimensions		75	90	110	160	200	250
DN (mm)		75	90	110	160	200	250
dn (mm)		80	80	80	80	80	80
H (mm)		338	340	360	380	470	488
L (mm)		145	150	160	180	210	230
Weight (kg)		7.4	8.7	10.3	15.5	21.2	32.7
PN (Bar)		16	16	16	16	16	16

Flange drillings available in SABS 1123/BS4504 Table 10/16, Bs10 Table D as well as a Multi-drilled option.

SCOUR TEES

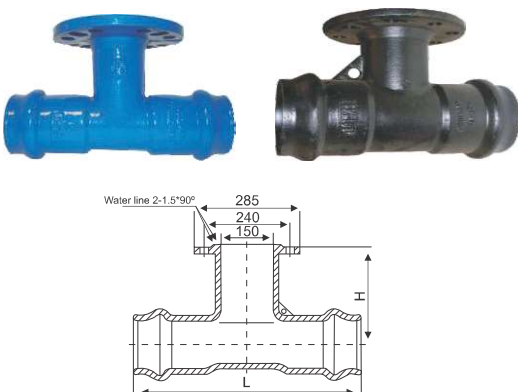

Dimensions		110	160	200	250
DN (mm)		110	160	200	250
dn (mm)		100	100	100	100
H (mm)		165	185	220	230
L (mm)		347	385	519	507
Weight (kg)		11.8	15.8	23.1	39.3
PN (Bar)		16	16	16	16

Flange drillings available in SABS 1123/BS4504 Table 10/16, Bs10 Table D as well as a Multi-drilled option.