

ELSTER KENT H4010 IN LINE STRAINER

Robust Simple Reliable




- Designed with low head loss, for use with Woltmann type meters
- Heavy duty stainless steel sieve element which is securely supported to the top and bottom of the body prevents large particles from damaging the measuring mechanism

- Special wave design provides the largest possible area of filter element
- Sieve element can be removed for cleaning or replacement, without disturbing the flange joints
- Maximum working pressure 16 bar
- Maximum water temperature 50°C


SIZES: mm 40 50 80 100 150

Approximate Headloss and Rate of Flow

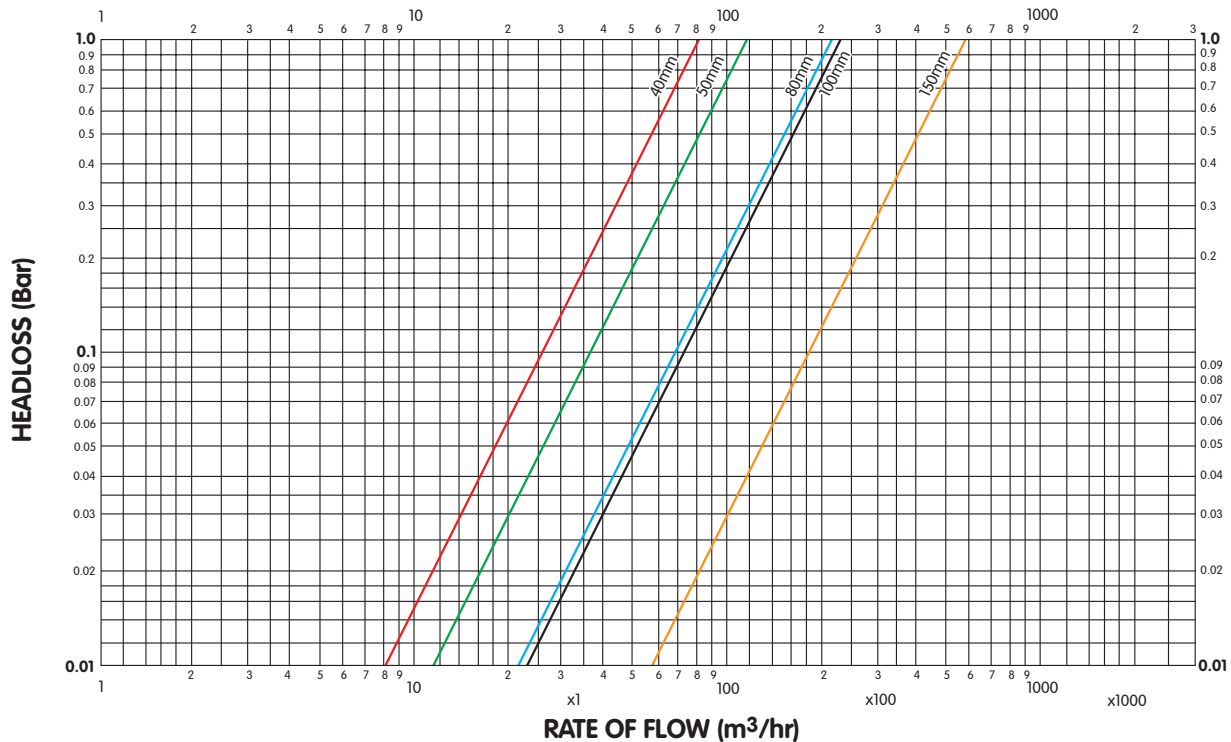

Dimensions

SIZE mm	A mm	B mm	C mm	D mm	E mm	F mm	WEIGHT kg
40	311	78	76	Ø151	85	81	12.0
50	200	78	83	Ø166	85	81	12.2
80	200	94	101	Ø201	85	92	14.1
100	250	106	114	Ø228	85	92	19.4
150	300	148	143	Ø286	145	158	34.0

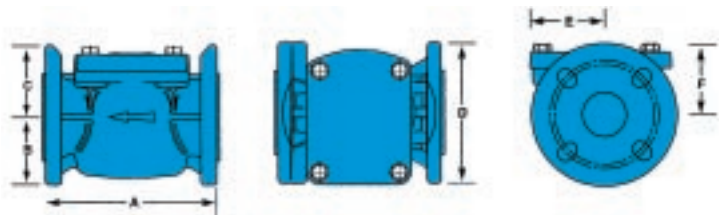

Flanges are dual drilled to allow connection to either BS10 Table D / BS4504 N/16. 40mm available with BS10 Table D flanges only.

Warranty

All goods are tested and inspected prior to despatch. In the event of defects resulting from faulty workmanship or materials, such goods will be replaced/repared at our discretion, free of charge at the factory, but no responsibility will be accepted for any direct or consequential damage. This warranty covers the malfunction of a correctly installed item due to a manufacturing fault, but does not cover wear and tear considered normal at the locality of installation.

Typical Specification

An in line strainer with heavy duty stainless sieve which is securely supported at the top and bottom of the strainer body. The sieve element can be removed from the top for cleaning purposes without disturbing the flange joints. The flanges to be dual drilled to allow connection to either BS11 Table D or BS4504 Table 16 flanges. (40mm to be drilled BS10 Table 10).



elster
Kent Metering (Pty) Ltd
PO Box 201 Auckland Park 2006
www.elsterkent.co.za

JOHANNESBURG
Tel: (011) 470-4900
Fax: (011) 474-0175

DURBAN
Tel: (031) 266-4915
Fax: (031) 266-9521

CAPE TOWN
Tel: (021) 511-8465/6
Fax: (021) 511-8446

BLOEMFONTEIN
Tel: (051) 430-2603
Fax: (051) 435-1455

PORT ELIZABETH
Tel: (041) 363-1943/2026
Fax: (041) 363-2127

The company's policy is one of continuous improvement and the right is reserved to modify the specifications without notice

40015/8/2008